DRAFT — NOT FOR SUBMISSION.

This manuscript is under active revision; its submission package is not consistent with it. Machine check: `python3 scripts/check_submission_package.py`.

Highlights

WavePrior: A Learned Spectral Prior for Grid-Free Wave Field Estimation from Sparse 3D Point Clouds

Saeyong Park

- WavePrior: a learned set-valued prior over continuous-wavenumber wave atoms.
- Beats the strongest eligible grid baseline on crowded synthetic seas.
- Survives a non-linear reference field and scene seeds no earlier batch had used.
- Ablations attribute the gain to the prior and to wavenumber continuity.
- On measured records it does not reach the pre-registered decision threshold.

WavePrior: A Learned Spectral Prior for Grid-Free Wave Field Estimation from Sparse 3D Point Clouds

Saeyong Park[a,*]

[a] *Avikus (HD Hyundai), Republic of Korea*

Abstract

Phase-resolved ocean wave fields must be reconstructed from sparse, irregular point clouds. The prevailing approach assimilates such returns into a spatial grid state, requiring interpolation onto that grid; the closest recent study assimilates the sparse returns directly, reports limited improvement, and names a spectral-state formulation in its outlook. We give a spectral-state formulation that goes beyond what that outlook names: the field is a small set of continuous-wavenumber spectral atoms constrained by the dispersion relation, placed by *WavePrior*, a learned set-valued prior, and refined by variable projection before per-frame updating. Of those properties only the prior is without precedent in the nearest prior art — sequential component-state tracking on a fixed frequency set, and continuous wavenumbers, both predate it — and we claim that one property rather than the combination, which no measurement here isolates. On crowded multi-component synthetic seas with a higher-order spectral reference field (17 of the 48 episodes realise it at second rather than third order), it lowers median normalised RMSE by -40.2% against the strongest eligible grid baseline we possess (43/48 episodes), in a comparison where that baseline itself retains skill against a zero predictor (47/48). The claim is carried by ablation, not by baseline comparison: removing the prior (45/48 episodes worse, against an analytic package that clears a zero predictor only thinly, 32/48) and

*Corresponding author

Email address: saeyong.park@avikus.ai (Saeyong Park)

removing only the continuity of the wavenumber (46/48) each cost measurable accuracy; the ablated comparator is not empty, beating a zero field on 38/48 episodes, and the coarser grid rung is a direction rather than a size because that arm has no skill. The gains are synthetic; the grid-baseline comparison is crowded-stratum only, and in the sparse stratum the evidence is split — the ablation reproduces there (14/16; comparator 12/16 against a zero field) while the learned package is not separated from the deployed analytic package. The checkpoint was trained on the same distribution family, so "out of sample" means the seed axis alone; and on 12 measured fixed-station records the prior does not reach the pre-registered decision threshold against a per-record zero-field reference. On a third party's synthetic fields it does not reach that threshold either; there a dispersion-preserving relabelling of the coordinates — a thought experiment about units, not a deployable configuration — attributes the failure to the estimator's absolute-scale design range rather than to the information in the returns.

Keywords: wave field estimation, LiDAR, spectral methods, learned prior, dispersion relation, data assimilation, sequential estimation

---

1. Introduction

1.1. Motivation: wave field information for maritime autonomy

Table 1 summarizes the notation used throughout. Knowledge of the surrounding ocean wave field is a prerequisite for many functions in autonomous and semi-autonomous ship operations [1, 2]: short-term prediction for proactive motion compensation during cargo handling and helicopter landing [3], route optimization to minimize fuel consumption and fatigue loading [4], wave-preview feedforward ride control on high-speed hydrofoil vessels [5], and structural health monitoring [6]. In each application the value of the estimate depends on its spatial resolution, update rate, and accuracy.

Table 1: Nomenclature.

Symbol	Description
$z(x, y, t)$	Surface elevation [m]
N	Number of spectral components
w_i	Amplitude of i-th component [m]
$k_{x,i}, k_{y,i}$	Wavenumber components [rad/m]
ω_i	Angular frequency [rad/s]
φ_i	Phase offset [rad]
g	Gravitational acceleration [m/s^2]
d	Water depth [m]
H_s	Significant wave height [m]
T_p	Peak period [s]
c_j	Confidence weight for observation j
θ_j	Beam incidence angle [rad]
r_j	Slant range to observation j [m]
M	Number of LiDAR observations per frame
nRMSE	RMSE normalized by H_s

1.2. LiDAR point clouds for ocean surface sensing

Among sensor modalities, wave buoys [7] lack spatial resolution, X-band marine radar [8, 9] images large areas but measures backscatter rather than elevation, and satellite altimetry [10] is too coarse for vessel-scale real-time use. Scanning LiDAR, by contrast, provides *direct* elevation measurements over a wide area at ∼10 Hz [11]. That capability is not hypothetical: airborne scanning lidar has resolved open-ocean wave fields and their directional wavenumber spectra since the 1990s [12], from aircraft rather than from ships and at a correspondingly larger footprint. We note this explicitly because the absence of *shipboard lidar* validation in the present work (Section 6.6) reflects the absence of a *publicly archived* phase-resolved lidar sea-surface dataset, not the absence

of such measurements. Current automotive-grade solid-state LiDAR systems operating at eye-safe wavelengths (1550 nm) offer >100 channels, wide fields of view ($\sim 120^\circ \times 25^\circ$), and ranges up to 250 m with centimeter-level accuracy in the near field. However, LiDAR observations are sparse (50–200 valid returns per scan), unevenly distributed (denser near the ship), and noisy (degrading with range and incidence angle). The challenge is therefore to reconstruct a continuous, physically consistent wave field from these sparse, heterogeneous observations in real time.

1.3. Grid-based paradigm and its limitations

The dominant approach follows a grid-based data assimilation paradigm adapted from numerical weather prediction: discretize space into a regular grid, represent the wave state at grid points, and apply an ensemble Kalman filter (EnKF/ETKF) with FFT-based spectral forecasting [13, 3, 14]. While principled, this approach has three limitations under sparse LiDAR: (i) *interpolation artifacts*—sparse returns must be mapped to grid points, introducing smoothing near the Nyquist limit (5 m grid $\rightarrow \sim$10 m minimum wavelength regardless of LiDAR density); (ii) *fixed resolution* independent of scene complexity, wasting capacity on simple seas and under-resolving complex ones; and (iii) *forecast cost* $O(N_e G^2 \log G^2)$ per step regardless of true wave complexity, e.g. 50 independent 2D FFTs for N_e=50, G=40×30.

1.4. Proposed approach

We propose **WavePrior**, a learned set-valued prior over spectral wave atoms, together with **WaveSplat**[1], the grid-free pipeline that carries it and eliminates the spatial grid entirely.

[1] The name reflects "wave" + "splat" in the sense of projecting (splatting) spectral components onto arbitrary spatial locations, analogous to point-based rendering; it does not imply a methodological connection to 3D Gaussian Splatting [15].

Two names, and what each denotes. We use two names and keep them apart. *WavePrior* is the learned spectral prior — the conditional diffusion model that proposes a set of wavenumbers in one shot from the initialisation window — and it is the contribution the evidence is strongest *for* (C4, and the ablation of Section 5.4). *WaveSplat* is the grid-free pipeline that takes those atoms and maintains the field: spectral parameterisation, variable projection, per-frame tracking. The distinction is not editorial: since the routing threshold was set to 0, every synthetic input resolves to the learned proposal path, so what ships on synthetic data *is* WavePrior inside WaveSplat. *Measured input is the exception* — the shipped router hands it to a separate bank estimator in which neither the prior nor the representation participates (Section 3).

Instead of discretizing space, we represent the wave field as a weighted superposition of N plane waves:

$$z(x, y, t) = \sum_{i=1}^{N} w_i \cos(k_{x,i}x + k_{y,i}y - \omega_i t + \varphi_i) \tag{1}$$

where each spectral component is parameterized by amplitude w_i, wavenumber $(k_{x,i}, k_{y,i})$, and phase φ_i. The angular frequency ω_i is not a free parameter but is *constrained* by the linear dispersion relation:

$$\omega_i = \sqrt{g\,|k_i|\,\tanh(|k_i|\,d)} \tag{2}$$

where $g = 9.81$ m/s^2 and d is the water depth. This hard constraint reduces the parameter space from $5N$ to $4N$, regularizes optimization, and ensures physically plausible wave propagation during temporal tracking.

Our key contributions are:

1. **Grid-free spectral estimation framework (C1) — the carrier, not the claim**: This framework is what carries the prior, and the companion thesis treats it as one methodological component rather than as the subject; we state it here for the same reason, so that the two documents do not sell different subjects. What the evidence supports is the *prior* (C4) and the continuity of the wavenumber representation, each isolated by

ablation. Direct estimation on sparse, irregularly distributed observations without grid interpolation, enabling wave field evaluation at arbitrary spatial resolution. Unlike single-snapshot sparse spectral methods [16], the spectral component representation persists across frames, allowing computationally efficient per-frame updates through the forward model's own $-\omega t$ term ($\sim$10 gradient steps) rather than re-running initialisation each frame, while supporting continuous monitoring without the discrete update latency of filter-based approaches. Persistence of a spectral component state across frames is not itself new: Pascoal et al. [17] and Kim et al. [18] already recurse one, on a fixed frequency grid and from ship motions (Section 2.4); it is not claimed here. Estimation accuracy depends on initialization quality; tracking refines amplitudes and phases given the wavenumbers established during initialization.

2. **Dispersion-constrained parameterization (C2)**: Hard enforcement of the full dispersion relation (including tanh depth dependence) reduces the free parameter count and acts as a physics-based regularizer, improving tracking stability over extended time horizons. (Appendix A, R4.) The claim made here is the parameter-count reduction. Whether this constraint contributes to *accuracy* **has not yet been measured**: the ablation arm previously used to support it removed the frequency initialisation together with the constraint, and a controlled intervention that isolates the constraint was null in both strata.
3. **Geometry-aware confidence weighting (C3) — not claimed** (Appendix A, R1): Per-observation weights $c_j = \cos\theta_j/(r_j/d_{\text{ref}})$ based on incidence angle and range were introduced to account for the heteroscedastic noise structure of LiDAR measurements on ocean surfaces. This is **withdrawn as a contribution**: on a fresh out-of-sample corpus, disabling the weighting was *better* in both the sparse and the crowded stratum. It is retained below only as a reported negative result.
4. **A learned set-valued prior over spectral atoms (C4)**: The atoms are placed by *WavePrior*, a conditional diffusion model over *sets* of wavenumber–

energy triples, conditioned on a beamform map of the initialisation window (§3). This is what the title names and it is the contribution the evidence is strongest for, because it is supported by an intervention inside our own arm rather than only by a comparison against someone else's: replacing the prior with the analytic proposal package, changing nothing else, costs -36.3% (45/48, $p = 6.56 \times 10^{-11}$). **Disclosure:** the right-hand side of that contrast is *thin, but it is not collapsed* — the analytic package clears a zero predictor on 32/48 episodes ($p = 1.47 \times 10^{-2}$), whereas the learned package does so on 48/48; both arms have skill — so the correct reading is *"the prior is what makes this arm work at all"*, not *"the prior adds a margin on top of a working arm"*. The gain is synthetic; on measured records the same representation does not reach the decision threshold (§5.6). **Scope of the novelty claim:** of the properties this representation combines, this one — an offline-trained, set-valued proposal — is the only one without precedent in the nearest prior art. Sequential component-state tracking, continuous wavenumbers, and a small data-chosen component count each have one (§2.4). We claim this property, not the combination: the ablations are one-factor and therefore measure marginal effects, not the interaction a combination claim would need.

The pipeline also includes an online model-order mechanism (energy-based pruning and residual-triggered growth) that matches the number of spectral components to scene complexity, from N=2 for simple swells to N=21 for complex multi-component seas. We deliberately do *not* list it as a contribution: measured under the corrected tracker with a median-of-3 seed protocol, its accuracy benefit is null (measured on the *retracted corpus* — the 100-episode dataset whose cross-arm comparisons are withdrawn because the two arms were never scored on the same frames, Appendix A, R5; archived), and we discuss it as a mechanism and a compute-efficiency device in Section 6.6 instead.

Relative to prediction-error frameworks for deterministic wave forecasting such as LEPrE [19], which quantify the error of a linear-fitting prediction pro-

Table 2: Comparison of ocean surface sensing modalities for vessel-scale wave field estimation. Typical values for operational systems.

Sensor	Spatial range	Resolution	Update rate	Direct elevation?	Key limitation
Wave buoy	Point	—	1 Hz	Yes	No spatial information
X-band radar	0.5–4 km	∼7.5 m	1–2 s/rev	No (intensity)	Requires SNR inversion
Satellite (altimeter)	Global	∼7 km	Days	Yes (nadir)	Coarse, non-real-time
Shipboard LiDAR	10–250 m	∼0.1 m (near)	10 Hz	Yes	Sparse, range-dependent noise
Ship motion (RAO)	—	—	Continuous	No (indirect)	Limited to encountered waves

cedure without proposing an estimator, we contribute the estimator itself: a nonlinear, dispersion-constrained, grid-free fit with online model order, evaluated on scanning-LiDAR sampling geometry.

The remainder of this paper is organized as follows. Section 2 reviews related work on wave field estimation. Section 3 presents the WaveSplat pipeline in detail and defines WavePrior, the learned prior it carries. Section 4 describes the simulation environment and evaluation metrics. Section 5 presents experimental results including baseline comparisons, ablation studies, and robustness analysis. Section 6 discusses the findings and limitations. Section 7 concludes.

2. Related Work

We organize the review around two axes: (1) the sensor modality used for ocean surface observation, and (2) the estimation algorithm used to reconstruct the wave field from observations. Table 2 provides a quantitative comparison of sensor modalities.

2.1. Conventional shipboard wave sensing

X-band radar is the most extensively studied sensor for shipboard wave estimation. Young et al. [9] first demonstrated that radar backscatter modulation (tilt, hydrodynamic, shadowing) carries wave spectral information, and Nieto-Borge et al. [8] recovered the directional wave spectrum via 3D FFT in the (k_x, k_y, ω) domain with the linear dispersion relation serving as a spectral filter. This "dispersion filtering" concept is conceptually related to our dispersion-

constrained parameterization, though applied in the Fourier domain rather than as a hard parameter constraint. Radar's fundamental limitation is that it measures backscatter intensity rather than surface elevation directly, requiring an empirical modulation transfer function that depends on radar parameters, wind speed, and sea state [8]; its spatial resolution ($\sim$7.5 m) is also coarser than LiDAR ($\sim$0.1 m in the near field). **Ship-motion-based** methods instead invert the vessel RAO to recover the incident wave spectrum from heave/pitch/roll measurements [20, 21]; these require no additional sensors but cannot resolve the spatial wave field, only the directional spectrum at the vessel location. Two studies in this line deserve naming precisely, because the sequential component-state recursion used later in this paper has a precedent there. Pascoal et al. [17] estimate a directional spectrum from the motions of *one* vessel by carrying, as the filter state, the real and imaginary parts of the complex wave amplitudes on a selected and thereafter *fixed* set of frequencies; the transition is the identity and the phase rotation is carried by a time-varying measurement matrix, and the estimator is exercised on sea-trial records. Kim et al. [18] — the journal form of the work reported in Kim [22] — build the same kind of state from a single heave channel on one vessel, on a fixed frequency grid spanning 0.1–2.0 rad/s at $\Delta\omega = 0.02$ rad/s, that is 96 frequencies and 192 states, and evaluate it on synthetically generated motion. Neither has a learned component; in the second the process and observation covariances are tuning knobs. And neither returns a spatial field: what leaves both estimators is a spectrum at the vessel.

2.2. Grid-based wave field reconstruction

Deterministic wave field reconstruction from spatially resolved LiDAR/radar has been dominated by spatial discretization combined with ensemble data assimilation. Desmars et al. [13] assessed deterministic nonlinear prediction algorithms against non-uniformly sampled wave gauges, and Wang et al. [23] assimilate sparse three-dimensional points into a gridded state with an ETKF and spectral propagation; the Ensemble Transform Kalman Filter [24] is preferred over the stochastic EnKF [14] for its deterministic analysis step. Des-

mars et al. [3] extended this framework with a nonlinear reconstruction-and-prediction scheme on remotely measured surfaces, demonstrating short-term forecasting up to one peak period ahead. Adaptation of ensemble Kalman filtering to scanning shipboard LiDAR has, to our knowledge, not been reported in the open literature; we therefore implement an ETKF-grid baseline by porting the formulation of Wang et al. [23] — the closest competing study, which assimilates sparse three-dimensional points into a grid state with an ETKF — to LiDAR observations (retracted corpus; archived). These grid-based methods share a common architecture—discretize the 2D domain into a regular grid, maintain an ensemble of spectral states, and assimilate observations via the Kalman update—which introduces an inherent trade-off between spatial resolution and computational cost, with interpolation from sparse observations to grid points being a known source of error. We distinguish this *deterministic* reconstruction from the *stochastic* wave prediction performed by large-scale spectral models such as WAVEWATCH III [25], which forecast bulk statistics at kilometer scales without resolving individual phases.

A complementary line of work asks not how to reconstruct the field but how large the resulting prediction error is. Fucile et al. [19], in this journal, model the surface elevation as a Gaussian stochastic process and derive a semi-analytical Linear Estimator of Prediction Error (LEPrE), which returns the prediction-error standard deviation in time and space for a phase-resolved linear wave model whose coefficients are obtained by linear fitting on measurements, and which places the notion of a "Predictability Region" on a probabilistic footing; the formulation is verified against Monte Carlo simulation for long- and short-crested seas. Our contribution is orthogonal on three axes. First, in *what is produced*: Fucile et al. [19] characterise the error of a given deterministic prediction procedure and do not propose a field estimator, whereas we propose one and benchmark its reconstruction accuracy against a grid-based ensemble-Kalman baseline. *estimator class*: LEPrE presumes a fixed model whose coefficients are determined by linear fitting, whereas the deployed pipeline here *chooses the model* — a learned prior proposes the set of wavenumbers in one shot, variable

projection then refines those wavenumbers with the dispersion relation imposed as a hard constraint, and the model order adapts online. Amplitudes and phases are themselves obtained in closed form by ridge least squares (Section 3); the difference from LEPrE is therefore not that we avoid linear fitting, but that what is being fitted is selected by the prior rather than fixed in advance — a class outside the fixed-order assumption on which the LEPrE derivation rests. Third, in the *evidence base*: the LEPrE formulation is agnostic to the measurement device, whereas our evaluation is specific to the sampling geometry of a scanning shipboard LiDAR, and that geometry is *simulated*: the shipboard configuration in this paper exists only in the sensor model. The measured records used in Section 5.6 come from fixed stations and from a different sensor modality, so no result here is supported by measured shipboard data, including sparse, range- and incidence-dependent returns and reflectivity-driven dropout. The two are naturally combined rather than opposed: WaveSplat currently returns point estimates without an error model (Section 6.6), and the LEPrE framework is the natural route to supplying one for the grid-free spectral representation.

2.3. Position of this work relative to the closest grid-based study

The closest study to ours assimilates sparse three-dimensional returns into a *spatial grid* state with an ensemble transform Kalman filter [23]. Two things about it shape our position.

First, sequential and continuously-updating operation is *not* what separates this paper from that line: recursive per-frame filters already exist there, and we therefore make no novelty claim on that axis — nor on the narrower axis of recursing a *spectral component* state, which is older still (Section 2.4). What differs is the state itself — a small set of continuous-wavenumber atoms rather than a grid — and the fact that the atoms are placed by a learned prior.

Second, and more usefully, that study does not merely leave direct sparse assimilation as future work: it *measures* it, and reports limited improvement at the original sparse locations relative to interpolating the returns first. Our contribution is therefore better described as a spectral-state implementation

of an intervention whose grid-state version has already been tried and found wanting, than as an untried idea. We are careful not to over-read the outlook of that paper: it points at a spectral-state formulation, not at a learned prior or at continuous wavenumbers, and the ablations in Section 5.4 are what carry those two components here.

2.4. What the nearest prior art already contains

Saying what a paper adds requires saying what it does not. We therefore set out, property by property, which of the four nearest works already holds each part of the representation proposed here.

Sequential component-state tracking is not ours. Pascoal et al. [17] and Kim et al. [18] already recurse a state of complex wave amplitudes over a fixed frequency set with an identity transition (Section 2.1); the per-frame update of Section 3 is the same idea. What differs is that our frequencies are not drawn from a grid, that the set is proposed rather than fixed in advance, and that the estimate is a field over space rather than a spectrum at the sensor. The last of these is the one clean separation: both of those works observe *ship motions* and return a directional spectrum, so neither is an alternative way of doing what this paper does.

Continuous wavenumbers are not ours either. Charnotskii [26] models the sea surface as a finite set of sinusoids whose parameters are drawn continuously rather than placed on a grid, and Wilson and Adams [27] learn continuous spectral-component locations from data as the parameters of a Gaussian-process kernel. We read the first at abstract level only and therefore attribute no estimator, dataset, or sequencing to it; it is a surface model, which is why it does not bear on the measurements reported here — but it does forbid the sentence "a continuous-wavenumber sparse representation is new".

Nor is a small, data-chosen component count. Wilson and Adams [27] bound the number of components and let automatic relevance determination shrink the surplus away, which is the service our pooling selector performs. Their fit is in-sample and their components carry no phase, so it is not the same object as the

prior used here; it is, however, the same claim about component count.

What is left is one property. Of the properties this paper's representation combines, exactly one has no precedent among these four works: an *offline-trained, set-valued* prior that proposes the atoms conditioned on an observation window before any fitting is done. That property is what C4 claims and what the ablation of Section 5.4 measures.

We do not claim the combination. It would be convenient to argue that the properties are worth more together than apart, and we do not, because nothing here measures it. The ablations of Section 5.4 are one-factor: each removes a single property while holding the other fixed in *both* arms, which measures two marginal effects and no interaction. A claim that the combination exceeds the sum of its parts is a claim of non-additivity, and it needs the two-factor cell in which both properties are removed at once — a cell this paper does not contain. A two-factor design was pre-registered for exactly that question, and its power analysis, written before any run, finds that the additive null it would have to test against predicts, for that missing cell, an error larger than this observable has ever been seen to take *in that episode*; the null and negative directions of the test are therefore not interpretable on it. That design has since been executed and returned no label: one of its blocking gates failed, for a reason unrelated to the power argument above — the gate required a proposal to differ across estimator seeds, which is true of the learned arm but false of the analytic one, whose proposal is deterministic given the episode. The non-interpretability stated here therefore rests on the pre-registered power analysis and not on that block. We state one property rather than a combination.

2.5. Grid-free alternatives: spectral, GPR, and learning-based

Several alternatives to grid-based assimilation have been explored. Classical **spectral estimation** methods (FFT, Welch, MUSIC, ESPRIT) assume regular sampling [28]; Capon's minimum-variance beamforming [29] and MUSIC [30] handle irregular arrays but either provide only power spectra without phases (Capon) or require known model order (MUSIC). In the deployed configuration

a beamformed power map is not the initialiser but the *conditioning input* of the learned proposal, which emits a *fixed* set of $M = 32$ wavenumber–energy pairs per sample; those are pooled and de-duplicated by a heuristic selector, and then refined under the dispersion constraint. Beamforming also remains the fallback initialiser when the learned path is not taken. What the learned prior supplies, and neither Capon nor MUSIC does, is a *distribution over wavenumber–energy sets* conditioned on one observation window; the model order is then fixed by the selector and the phases by a least-squares fit, so neither is learned. The nearest thing to it in the wider literature is the spectral-mixture kernel of Wilson and Adams [27], which also places components at continuous spectral locations chosen from data and also bounds their number; the difference is that its locations are fitted to the series being modelled rather than proposed by a model trained offline, and its components carry no phase (Section 2.4).

Gaussian process regression [31] with Matérn or squared-exponential kernels provides nonparametric spatial interpolation but scales as $O(M^3)$ and, in its standard single-frame form, lacks a temporal propagation model; sparse approximations [32] mitigate cost but still treat the wave field as a generic spatial random process rather than a dispersion-constrained propagating signal.

Learning-based methods include physics-informed neural networks [33, 34], the U-Net/Fourier neural operator of Ehlers et al. [35] for phase-resolved reconstruction, and the nonlinear ETKF extension of Desmars et al. [3]. These approaches show strong results on their training distributions but face practical challenges for arbitrary shipboard sensor configurations: FNO-style models assume uniform training grids incompatible with scanning-LiDAR irregular sampling, generalization across sensor geometries is limited, and the black-box nature complicates failure diagnosis. WaveSplat, by contrast, handles irregular observation geometries natively and produces directly interpretable spectral parameters that satisfy the dispersion relation by construction. It does use a learned component — the set-valued prior that proposes the initial atoms — but the learning enters only as a *proposal* over a physically constrained parameter space, not as a grid-shaped regression target: the estimate that leaves the

pipeline is a set of dispersion-consistent atoms fitted to the observations, and the ablation in Section 5.4 is what measures how much the prior contributes. Direct experimental comparison with learning-based methods is beyond the scope of this work, which focuses on physics-constrained spectral estimation; such a comparison would require careful control of training distribution, sensor geometry, and computational budget. Its grid-free sparse representation is conceptually related to the compressed sensing literature [36, 37] and to Donelan et al. [16]'s directional spectral analysis of propagating waves, with three key differences: (1) each basis function is a physically meaningful plane wave with frequency constrained by the dispersion relation rather than a generic sinusoid or wavelet; (2) the model order is adapted *online* during initialisation based on residual energy, rather than fixed a priori (we do not claim this mechanism as a contribution — see Section 6.6); and (3) the spectral components *persist* across frames: because each atom carries its own ω, the forward model evaluates at any later time without re-estimation, so a frame costs 10 gradient steps rather than a fresh reconstruction. We state this as a structural property and not as a demonstrated latency, and we measure it rather than assert it (Section 3.5).

3. Method

3.1. Forward model

The wave field is modeled as a superposition of N linear plane waves (1). Each component i has four free parameters: amplitude w_i, wavenumber components $(k_{x,i}, k_{y,i})$, and phase offset φ_i. The angular frequency ω_i is deterministically computed from the dispersion relation (2), reducing the total parameter count from $5N$ to $4N$.

This linear forward model is an $O(\epsilon^2)$ approximation to higher-order wave theories (e.g., Gerstner waves or second-order Stokes), where $\epsilon = |k| \cdot |w|$ is the wave steepness. At Beaufort 4, typical steepness is $\epsilon \approx 0.05$, giving a model mismatch of $< 0.25\%$. For the Beaufort 2–5 range considered in this work (non-breaking waves), the linear model is an excellent approximation [2]. This is an

analytic estimate for real ocean waves. It does **not** describe the *linear* synthetic corpus used in this paper: there the ground truth is a displacement-free linear superposition, so the measured mismatch against the model equation is exactly zero (see Section 4). The higher-order corpus that carries the headline ablations is not exactly inside that class (Section 5.6).

3.2. Observation model

At each LiDAR scan at time t, we observe M elevation measurements $\{(x_j, y_j, z_j)\}_{j=1}^{M}$ at irregular spatial locations. The observation model is:

$$z_j = \sum_{i=1}^{N} w_i \cos(k_{x,i} x_j + k_{y,i} y_j - \omega_i t + \varphi_i) + \varepsilon_j \tag{3}$$

where ε_j is observation noise with variance depending on range and incidence angle. The number of valid observations per frame varies between 50 and 200, depending on sea state, vessel motion, and LiDAR raydrop characteristics.

3.3. Geometry-aware confidence weighting (C3), which we do not claim

This mechanism is described here for completeness, but it is *withdrawn as a contribution*: on a fresh out-of-sample corpus, turning the weighting off was better in both the sparse and the crowded stratum. Read this section as a description of an implemented component and a reported negative result, not as a claimed accuracy benefit.

LiDAR elevation accuracy on ocean surfaces degrades with two physical mechanisms: (1) beam divergence increases the footprint area at longer ranges, averaging over local surface curvature; and (2) at high incidence angles (near-grazing geometry), the probability of specular reflection increases, causing either total signal loss or biased returns from wave crests.

We assign per-observation confidence weights:

$$c_j = \frac{\cos(\theta_j)}{r_j / d_{\text{ref}}} \tag{4}$$

where θ_j is the beam incidence angle between the LiDAR ray direction and the local water surface normal $\mathbf{n}$, r_j is the slant range to observation j, and $d_{\text{ref}} = 125$ m is a reference distance chosen as half the maximum LiDAR range.

On the measured records this weight is a constant, and the deployed real-data route does not read it. The reference distance was chosen for a shipborne sensor; the fixed stations we evaluate on stand 23–27 m from the scored patch, so $\cos\theta_j/(r_j/d_{\mathrm{ref}})$ exceeds one at *every* observation point of every record — its smallest unclamped value across the seven records with recovered geometry is 1.23 — and the clamp to $[0,1]$ makes $c_j \equiv 1$. Separately, and measured by execution rather than read off the source, substituting a weight that does vary changes the estimate on $0/7$ records under the shipped real-data route and on $7/7$ under the learned route: the route that fails on measured data is the only one that consumes this field. We report both facts here because Eq. 4 would otherwise read as an active component of the measured-data results, and it is not. In the simulation experiments reported here, $\mathbf{n}$ is obtained from the ground-truth surface mesh, which (see Section 4) is a displacement-free linear superposition rather than a Gerstner surface. For real-data deployment, the surface normal is unknown prior to reconstruction; a pragmatic approximation is $\mathbf{n} \approx \hat{\mathbf{z}}$ (flat-surface assumption), introducing a slope-dependent error bounded by the wave steepness $\epsilon \approx 0.05$ at BF4 ($\sim 3^\circ$ normal deviation). For near-normal observations ($\theta < 30^\circ$) this yields $< 2\%$ error in $\cos\theta_j$; grazing observations ($\theta \approx 60^\circ$) can see up to $\sim 9\%$ error. These weights (4) are incorporated in the optimization loss as weighted mean squared error, giving higher influence to close-range, near-normal observations.

3.4. Two-phase estimation

The estimation proceeds in two phases: an initialization phase that establishes the spectral model from multi-frame observations, followed by a per-frame tracking phase that maintains the model with minimal computation. Table 3 and Fig. 1 summarize the complete pipeline.

3.4.1. Phase 1: Initialization

Given the first $T_{\mathrm{init}} = 2T_p$ seconds of observations, we must place N atoms in the (k_x, k_y) plane and fit their amplitude and phase. Two procedures do this

Table 3: Algorithm: the deployed estimation pipeline, transcribed from the shipped configuration (`init_method`=`auto`, `auto_switch_thresh`=0). Constants are the values in the source, not targets. *This replaces an earlier listing that described the analytic initialiser*: under the shipped configuration the router resolves to the learned path, and the analytic beamforming initialiser and its N=3 → 8 → 15 staging are not reached. The analytic procedure is still described in Section 3.4.1 because it is the comparison arm of the prior ablation.

Phase 1: Initialization (frames with $t \leq 2T_p$; see the note on T_p in Section 3.4.1)
1. Accumulate the window's observations $\{(x_j, y_j, z_j, t_j)\}$
2. Subsample to at most 400 points, fixed seed — *for the proposal only*
3. Conditioning map: 64×64 beamform power over $k_x, k_y \in [-0.6, 0.6]$ rad/m, ω from the dispersion relation at a *fixed* $d = 50$ m baked into the module at import — the configured depth does not reach this map
4. Conditional diffusion: 4 draws × 32 atoms, 500 reverse steps
5. Per-draw polish: 80 Adam steps on the phase-marginalised likelihood
6. Pool: keep energy $> 0.03\, e_{\max}$; *drop* any atom within Δk=0.03 rad/m of a stronger one; cap at $N_{\max}$=30
7. Amplitude and phase in closed form: ridge least squares (λ=0.5)
8. Joint non-linear fit: *disabled* (0 iterations)
9. Adaptive order: prune to 90% energy (roll back if residual RMS rises >30%); if residual RMS > 0.05 m, add via a 61×61 scan with 31×31 refinement, random initial phase, then 50 Adam steps
10. Variable projection: 400 Adam steps on (k_x, k_y) with the linear coefficients eliminated in closed form; steepness clamp 0.15
Phase 2: Tracking (each subsequent frame)
1. Slide a K_w=3 frame window
2. Freeze $(k_{x,i}, k_{y,i})$; 10 Adam steps at lr 0.005 on (w_i, φ_i) over the window — loss: confidence-weighted MSE + $\lambda_1 \|w\|_1$ (λ_1=10^{-4}) + spectral smoothness
3. Steepness clamp 0.15 — *no explicit phase advance*: the forward model's $-\omega_i t$ term carries the propagation

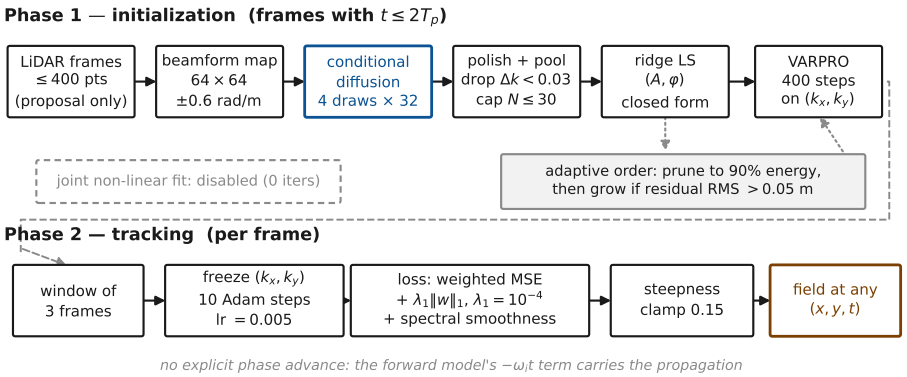


Figure 1: The deployed pipeline. Phase 1 conditions a diffusion prior on a coarse beamform map of the initialisation window, draws and polishes candidate atom sets, pools them into at most 30 atoms, fits amplitude and phase in closed form, and refines the wavenumbers by variable projection; the adaptive prune-and-grow step runs before variable projection, on a model that has had no joint refinement. Phase 2 freezes the wavenumbers and updates (w_i, φ_i) over a three-frame window. Blue marks the one learned component, brown the output. The dashed rectangle is a stage that exists in the code and is switched off in the shipped configuration; the dashed path is the transition between phases. Every constant printed in this figure is read from the source at generation time by `scripts/gen_fig_pipeline.py`, which also asserts the four switches that would change its structure.

in our system, and *which one runs is the subject of one of our ablations*, so we describe both.

The learned prior: architecture, training data, and what we cannot certify. The prior is a conditional denoising diffusion model over *sets* of atoms. Its conditioning branch is a small convolutional encoder that reduces the 64×64 beamform map to 256 tokens of width 128 (3×3 convolutions, group normalisation, GELU, with a learned positional embedding). Its denoiser is a stack of 4 pre-norm transformer blocks of the same width: within each block, self-attention over the 32 atom slots, cross-attention into the conditioning tokens, and a two-layer feed-forward network. Atoms enter and leave as three normalised numbers — two wavenumber components and a log-energy — through linear projections, so the model is permutation-equivariant over the set by construction and has

no notion of atom ordering. It has 1,454,723 parameters. Sampling is ancestral DDPM with a cosine noise schedule over 500 steps, and training is the standard ϵ-prediction mean-squared error under AdamW (learning rate 2×10^{-4}, weight decay 10^{-4}, cosine annealing, batch 32).

Training scenes are synthetic and are drawn from a deliberately stratified mixture rather than from the evaluation distribution: discrete crowded (15 and 30 components) at 0.30, discrete sparse (1 and 2) at 0.20, five-component at 0.10, two continuum strata at 0.10 and 0.15, and an intermediate-spreading stratum at 0.15, with sea states covering Beaufort 2–5 anchors and a jittered box around them. The observation geometry used in training is not drawn independently: frame-structured sweep windows are replayed from 14 donor episodes, and only the observation coordinates are taken from a donor — the surface is always re-rendered from the fresh synthetic scene. That bank of 14 geometries is small, and it is the only view of sensor geometry the prior ever had. *Those donor episodes are themselves simulated*: they are WaveSim episodes drawn from the same generator family, so no measured record enters training in any form, observation geometry included — the shipped checkpoint has never seen a byte of measured data. It is now a measured limit in one direction rather than only a noted one: on a third-party corpus whose observation aperture is substantially wider than that of the training pool, the shipped arm has no skill until the absolute scale is moved (Section 5.7). No donor episode appears in the frozen result rows of any batch this paper cites (checked mechanically over all 122 such files). *Scene seeds for training are drawn from the band* $[\,2 \times 10^9,\ 2^{31} - 1\,)$*, which is disjoint from every seed used by any evaluation generator in this paper.* The largest evaluation seed appearing in any frozen result row of this project is 1,735. No evaluation episode of any batch cited in this paper was therefore seen during training, although the generator family is the same — which is the sense in which Section 5.9 says only the seed axis is out of sample.

The shipped checkpoint was trained from scratch for 40,000 steps at batch 32 — 1,280,000 scene draws — against a held-out validation set of 256 scenes generated from a separate seed and scored every 1,000 steps. The final losses

are 0.0595 (training) against 0.0862 (validation), and the whole curve is in the repository. Two qualifications belong with that pair. The training figure is a *single minibatch*, not an average, and neighbouring evaluations straddle it in both directions, so the apparent gap is not a stable quantity; the validation figure is stable because it is scored on frozen noise. And "held out" here means an independent random stream — a separate seed drawing from the same generator, the same donor bank and the same seed band — not a set constructed to be disjoint. We did not use the curve to select a stopping point and no early stopping was applied. The checkpoint's SHA-256 is `636c72a797ee6d0b72544929 3d5cd230dbd64c8eb03e345da4561b0c265239d9`. We are precise about what that digest does: it is recorded in the estimator source and a unit test asserts that the shipped file matches it, but the loader does *not* check it at run time, so a reader who substitutes a different checkpoint will not be stopped by the code.

Two things about this we cannot certify and will not claim. First, the six training strata were measured only as a bundle: no ablation isolates what each contributes, so we cannot say which part of the mixture the prior's behaviour comes from. Second, the batch that produced this checkpoint recorded checksums for its own training script and preregistration, and those checksums do not match the files that were committed with them. The files themselves have not drifted — they are byte-identical to their single committed version — so what is missing is not the code but the guarantee: the freeze was taken, the files were then edited, and the freeze was never re-taken. The architecture and the checkpoint identity above are read directly from the shipped weights; every training number above is read mechanically from that batch's committed artefacts — its training curve, its generator source and its run log — so the recipe *is* reproducible from the repository. What a reader cannot do is use the freeze certificate to prove that those artefacts are the ones that produced these weights. That is a weaker defect than an absent record, and we prefer to name it exactly rather than to describe it away.

A dependency we disclose rather than describe away. The length of the initialisation window is set by the true peak period of the episode, read from the scene metadata, rather than estimated from the observations; on the measured records it is read from the record's own reported spectrum. This is a property of the harness and not of any arm: the window is computed once, before an initialisation procedure is selected, so within a single batch run every arm sees exactly the same frames, and the scoring frames are chosen the same way. One comparison in this paper splices its two arms from batches run eight days apart (B-1), and we checked that case separately rather than assuming it: recomputing the deterministic scoring-frame rule from each episode reproduces the frame count the baseline rows recorded, on 64/64 episodes. It does mean that a deployment would need to supply T_p from another source, and that no experiment here measures the sensitivity of the method to getting it wrong.

What "the shipped configuration" selects, and when. The router that selects an initialisation procedure is not purely a quality heuristic: it also branches on whether the input carries a ground-truth field. When none is present — which is the case for every measured record — the shipped configuration switches to a separate estimator built around a bank of candidate spectra, and the learned path described above is not entered at all. Table 3 therefore describes what runs on the synthetic corpora. The measurements that report no skill on the measured records (Section 5.6 and Table 8) were obtained by *overriding* that router and forcing the learned path, because the question those batches ask is what the learned prior does on real data, not what the shipped default does. The bank estimator is not a contribution of this paper and no result of it supports any claim made here. It does appear, as the deployed reference arm of Figs. 4 and 5, where it is scored against its own per-record zero-field reference and not against the learned arm; that is a disclosure about where the shipped configuration actually sends measured input, not a result we claim. We state its existence because a reader reproducing "the shipped configuration" on a real record would otherwise get a different algorithm than the one we describe.

Deployed path: the learned set-valued prior (WavePrior). The configuration evaluated in Section 5 places the atoms with a learned prior over wavenumber–energy *sets*. A conditional diffusion model, trained on synthetic scenes, is conditioned on the initialisation-window observations and draws several posterior samples of an atom set; the pooled draws are then thresholded on energy, then deduplicated in wavenumber (an atom is dropped when a higher-energy atom lies within $\Delta k = 0.03$ rad/m of it *on both axes*), and truncated at $N_{\max}$. Given the resulting wavenumbers, the amplitude and phase of every atom are obtained in closed form by ridge-regularised least squares, and the whole set is refined by *variable projection*: because the model is linear in (a_j, b_j) once $(k_{x,j}, k_{y,j})$ are fixed, the linear coefficients can be eliminated analytically and only the wavenumbers are iterated.

The learned proposal cannot place an atom outside a bounded region: the network emits normalised coordinates that are clipped to $[-1, 1]$ and rescaled by a constant that lives in a *second* checkpoint. The deployed learned path loads two files: the conditional denoiser identified above, and an earlier unconditional set-diffusion checkpoint (`setdiff_prior.pt`, SHA-256 `5e8418cc1658`) from which it reads the normalisation constants that the two models share. The rescaling constant is one of these, giving $|k_x|, |k_y| \leq 1.1$ rad/m. For the sea states evaluated here the largest true wavenumber is near 1.0 rad/m, so the bound is satisfied with little margin, and it is a property of the checkpoint rather than of the representation — the analytic alternative searches ± 4 rad/m. A tighter bound applies upstream: the only view of the data the network receives is the conditioning periodogram, and that grid spans ± 0.6 rad/m. Components with $|k|$ between 0.6 and the clip bound are therefore outside the network's input entirely, and can be reached only by the residual-growth step, whose beamformer does search the wider range. We have not measured how often that happens. Any application to shorter waves would need the prior retrained, and we have not measured what happens when a true component lies outside the bound. *That grid also fixes a depth.* The frequency of each cell of the conditioning map comes from the dispersion relation evaluated at a water depth of 50 m, which

is a module-level constant baked into the map when the module is imported; the depth given in the estimator's configuration reaches the forward model, the least-squares fit and the dispersion constraint, but not this map. The training corpus was generated at the same depth, so the map is self-consistent with the checkpoint, and the mismatch appears only when the data are deeper. Repairing it is measured in Section 5.7 and does not reach that batch's threshold.

The bound is not only an upper one. Section 5.7 reports a third-party corpus whose peak wavenumber sits an order of magnitude *inside* every bound stated above, at a peak period inside the prior's training band, and on which the shipped learned arm nevertheless has no skill against a zero field until the coordinates are relabelled. The deployed estimator therefore has an absolute-scale design range that is closed at both ends rather than only at the top, and moving the absolute scale of one subsystem is enough to reopen it — which is a statement about a subsystem and not about any one constant. We have not measured a rule that selects that scale from the observations alone.

Two deployment choices matter for reproducing the numbers in this paper. Variable projection is enabled (400 steps); and the joint non-linear fit that earlier versions ran after initialisation is *disabled* (0 iterations) — it was measured to be redundant once variable projection is present. These two are not independent: removing the joint fit leaves a larger residual, which in turn makes the adaptive growth rule of Section 3.4.2 fire far more often than it did before. A third value in the shipped configuration is worth naming because it is *inert*: the configuration sets an analytic-path ensemble of 3, but the router resolves to the learned path and the ensemble size is then re-read for the resolved route, which ships at 1. No median-of-k ensemble therefore runs in the shipped configuration. Two places in this paper report results that do use one, both deliberately: the two S-ENS rows of Table 6, and the analytic comparator of the W-15 re-aggregation in Section 5.6, whose package is the analytic path *with* its ensemble intact. We say so because a reader inspecting the configuration file would reasonably conclude otherwise. We note this because it is easy to reason about either switch alone and be wrong about the resulting system.

Alternative path: dispersion-aware beamforming. The system also contains a purely analytic initialiser, which is what runs when the learned prior is not used. It is described next both because it is the fallback and because it is the *comparison arm* of the prior ablation in Section 5.4: replacing the learned proposal with this procedure, changing nothing else, is what accounts for a margin of -36.3% — against an analytic package that itself clears a zero predictor, though thinly (32/48, $p = 1.47 \times 10^{-2}$).

Dispersion-aware beamforming. Initial wavenumber estimates are obtained by scanning a Cartesian grid in wavenumber space. The grid covers $k_x, k_y \in [-4.0, 4.0]$ rad/m with 81×81 bins (resolution $\Delta k \approx 0.10$ rad/m), spanning wavelengths from ∼1.6 m to ∼130 m and encompassing Beaufort 2–5 conditions at d=50 m depth. The search bound of 4.0 rad/m is set conservatively above the highest wavenumber component present in the dataset ($|k|_{\max} \approx 1.0$ rad/m for BF3–5 sea states), ensuring full coverage with margin.

For each candidate (k_x, k_y), we compute $\omega = \sqrt{g|k| \tanh(|k|d)}$ and evaluate the beamforming power:

$$P(k_x, k_y) = \left| \sum_j z_j \, e^{-i(k_x x_j + k_y y_j - \omega t_j)} \right|^2 \tag{5}$$

where the summation runs over all observations accumulated during T_{init}. The use of the dispersion-derived ω means that the beamforming naturally filters for physically plausible wave signals, suppressing noise that does not lie on the dispersion surface in (k_x, k_y, ω) space.

Peaks in P are extracted greedily: the maximum is selected, then all candidates within a Cartesian radius of 0.15 rad/m are suppressed, and the process repeats. The 0.15 rad/m threshold prevents double-counting of the same wave component spread across adjacent wavenumber bins, while being narrow enough to resolve crossing sea systems. The initial amplitude and phase of each extracted component are estimated via linear least-squares projection of the accumulated observations onto the selected wavenumber basis functions.

Each extracted peak is then refined locally via a second beamforming pass

on a finer 41×41 grid spanning ± 0.2 rad/m around the coarse peak ($\Delta k_{\text{fine}} = 0.01$ rad/m), improving wavenumber accuracy from ~ 0.10 to ~ 0.01 rad/m. Without this refinement, the 0.10 rad/m coarse grid would limit $|\mathbf{k}|$ accuracy to roughly 17% at typical BF4 wavenumbers ($|\mathbf{k}| \approx 0.6$ rad/m), inducing significant phase drift during subsequent tracking.

Coarse-to-fine optimization. Starting from the beamforming initialization, we optimize the spectral parameters in three stages (N=3 $\rightarrow$ 8 $\rightarrow$ 15), with up to 200/200/500 iterations of the Adam optimizer [38] (learning rate $\text{lr} = 1 \times 10^{-2}$, $\beta_1 = 0.9$, $\beta_2 = 0.999$) at each stage. The loss function is:

$$\mathcal{L} = \underbrace{\frac{1}{M} \sum_j c_j \left(z_j - \hat{z}_j\right)^2}_{\text{weighted MSE}} + \underbrace{\lambda_1 \sum_i |w_i|}_{\text{sparsity}} + \underbrace{\lambda_s \sum_i \left(w_{\sigma(i)} - w_{\sigma(i-1)}\right)^2}_{\text{spectral smoothness}} \tag{6}$$

where $\lambda_1 = 10^{-4}$ promotes amplitude sparsity (driving negligible components toward zero for subsequent pruning) and $\lambda_s = 10^{-4}$ penalizes abrupt amplitude variations between spectrally adjacent components (σ denotes ordering by $|k|$), encouraging smooth spectral envelopes consistent with JONSWAP-like spectra.

During optimization, wavenumber components $(k_{x,i}, k_{y,i})$ are free parameters (unlike in the tracking phase). The dispersion constraint is enforced by computing ω_i from $(k_{x,i}, k_{y,i})$ at each forward evaluation rather than treating ω_i as a free parameter, ensuring that the constraint is satisfied exactly throughout optimization.

3.4.2. Adaptive model order

After initialization, we apply energy-based pruning. Components are sorted by energy $E_i = w_i^2$ in descending order, and the minimum set capturing 90% of total energy $\sum_i E_i$ is retained. This criterion is motivated by the JONSWAP spectral shape, where a small number of components near the spectral peak typically contain the majority of the wave energy.

A safety check prevents aggressive pruning from discarding physically significant components: if the post-pruning RMSE exceeds 130% of the pre-pruning value, pruning is rolled back entirely. This can occur when two components of

similar energy contribute to different spatial regions (e.g., crossing seas), making each individually appear low-energy.

If the residual RMS after pruning exceeds $\tau_R = 0.05$ m (indicating unmodeled wave energy), new components are grown by applying beamforming to the residual signal $r_j = z_j - \hat{z}_j$ and adding the dominant residual peaks to the model, up to $N_{\max} = 30$. Grown components are initialized via this residual beamforming step and are not re-run through the full $N{=}3{\to}8{\to}15$ coarse-to-fine schedule, trading some initialization quality for computational efficiency at this stage. The threshold is derived from the theoretical residual floor: combining LiDAR range noise ($\sigma_r \approx 0.02$ m) with a nonlinear–linear model mismatch allowance at BF4 ($O(\epsilon^2)\, H_s/2 \approx 6$ mm; this term is an allowance for real waves and is **absent** in the *linear* synthetic corpus, where the measured mismatch is zero) and angular-noise projection ($\sim$5 mm) yields a lower-bound RMS of $\sim$0.022 m; $\tau_R = 0.05$ m provides a $\sim$2.3$\times$ safety margin for unambiguous detection of unmodeled signal. A caveat here belongs to a rendering that this paper no longer uses. On the *superseded* 40$\times$30 mesh, the mesh's own facet-rendering error contributed comparably to this budget (mean $\approx$0.048 m for BF3–BF5 multi-component scenes, versus the $\sim$0.022 m physical floor above), so part of what triggered residual-based growth there may have been rendering error rather than unmodeled wave content. The corpora used here are rendered at 200$\times$167 (Section 4), whose spacing is adequate for every component present; *we did not re-measure the facet-rendering error on that mesh*, so we state the old figure as a property of the old rendering and leave the re-validation of τ_R open. We also note that τ_R is an *absolute* residual RMS in metres, compared without normalization by sea state, so its effective strictness varies with H_s; a scale-invariant form that normalizes the residual by the observed signal RMS is implemented but not enabled by default. A sensitivity sweep over $\tau_R \in \{0.02, 0.05, 0.08, 0.10, 0.15\}$ m on 12 representative episodes of the retracted corpus found no ordering among the values in [0.05, 0.15] m, while $\tau_R = 0.02$ m caused over-growth in multi-component seas. The per-value levels from that sweep are not quoted: it was run on the retracted corpus and before the tracker phase-advance correction,

and no re-measured substitute exists. The value $\tau_R = 0.05$ m has been held fixed in every batch reported here.

3.4.3. Phase 2: Tracking

For each subsequent LiDAR frame we perform a single update step. There is no explicit predict step: an earlier version advanced the phases by $\varphi_i \mathrel{+}= \omega_i \Delta t$ before each update, but that path is switched off in the shipped configuration and the forward model's own $-\omega_i t$ term carries the propagation instead, with t the absolute frame time. The update performs $K = 10$ Adam steps (lr $= 0.005$) on the weighted MSE loss over a sliding window of $K_w = 3$ recent frames, updating only amplitudes w_i and phases φ_i while freezing wavenumbers $(k_{x,i}, k_{y,i})$ (`w_phi` tracking mode).

Freezing wavenumbers during tracking is motivated by two considerations. First, wavenumber estimation from a single frame is ill-conditioned: the LiDAR's irregular sampling does not constrain the wavenumber from one snapshot, whereas the initialisation window spans $2T_p$, which at 10 Hz and the peak periods used here is on the order of one to two hundred frames. Second, with the wavenumbers fixed the per-frame problem is linear in a small number of parameters, so a short optimiser budget suffices.

The sliding window ($K_w = 3$) uses the three most recent frames for gradient computation. This provides temporal averaging that smooths single-frame noise without introducing excessive latency: at 10 Hz, the window spans 0.3 s, much shorter than the peak period T_p for all sea states considered.

3.5. Computational complexity

Let M denote the number of LiDAR observations per frame and N the number of spectral components.

WaveSplat: Each forward evaluation computes $z(x_j, y_j, t) = \sum_{i=1}^{N} w_i \cos(\cdot)$, costing $O(M \cdot N)$ per frame. With K gradient steps and window size K_w, the per-frame tracking cost is $O(K \cdot K_w \cdot M \cdot N)$. In practice, K=10, K_w=3, $N \leq 30$, measured on CPU. An earlier absolute per-frame figure quoted here was with-

drawn as a cross-process timing (Appendix A, R3); the measured replacement is below.

This analysis covers the tracking phase only. It is unchanged by which initialisation ran, because the tracking loop does not branch on the initialiser, and we verified that: across a pre-registered 64-run batch spanning two initialisation routes, two strata, and CPU-only versus GPU-available execution, the per-frame tracking cost varied only between 5.91 and 6.26 ms.

Measured budget. Table 4 gives the whole batch rather than a summary of it. The cell the preregistration named as the reporting cell — CPU-only, crowded, one thread — costs 5.91 ms per tracking frame, or 5.9% of a 10 Hz budget, with initialisation a one-off 5.18 s. We are precise about the word *reporting*: the preregistration called that cell "the most conservative", and the measurement does not bear that label out. All eight cells lie between 5.91 and 6.26 ms and the reported cell is the fastest of the eight, so it should be read as the cell fixed in advance, not as a worst case. The spread across the table is the substantive point — a factor of 1.06 between the extreme cells — and it is why the tracking analysis above does not branch on which initialiser ran.

Two rows run against the intuition a reader may bring. The learned initialiser is *faster* than the analytic alternative, not slower — 5.18 s against 26.61 s on the same episodes — despite running a 500-step reverse diffusion sampler four times; we report the direction and do not attribute it. And a GPU buys almost nothing: the same initialisation takes 4.86 s with one available, and every GPU row is marginally *slower* per frame than its CPU counterpart. No number here is comparable with any latency in the earlier version of this paper, which came from separate processes, and the batch did not run a baseline arm, so no comparative timing claim is available.

A second, query-side timing. Evaluating the estimated field at a point costs 137 μs, linear in the number of query points over the measured range, so a 0.1 s frame budget admits of order several hundred query points. Two caveats travel with that number and neither is small: it was measured on the grid-based path

Table 4: Measured cost of the deployed estimator, one process, one thread, on an AMD Ryzen 7 7800X3D. Every cell is 8 episodes; the per-frame column is the median over episodes of the per-episode median frame, with the interquartile range (the batch takes the upper median of an even sample, 'sorted(v)[n//2]'), and the budget column is that value against a 10 Hz frame interval. Initialisation is a one-off cost and is not part of the per-frame figure. *No baseline arm was run in this batch*, so no comparative timing claim follows from it, and these numbers are not commensurable with the cross-process figures withdrawn in Appendix A, R3. Pre-registered as T-6; all ten gates pass, including a per-run read-back that the thread count was one and that the shipping constants were in force. This batch runs one estimator seed, unlike the accuracy batches, which use three; timing is not averaged over seeds.

Device	Init. path	Stratum	Frame [ms]	10 Hz budget	Init. [s]
CPU	learned	crowded	5.91 [5.85,6.07]	5.9%	5.18
CPU	learned	sparse	5.95 [4.92,6.01]	5.9%	5.89
CPU	analytic	crowded	6.05 [5.87,6.08]	6.0%	26.61
CPU	analytic	sparse	5.97 [5.91,5.99]	6.0%	17.08
GPU	learned	crowded	6.20 [6.12,6.24]	6.2%	4.86
GPU	learned	sparse	6.06 [5.08,6.15]	6.1%	4.30
GPU	analytic	crowded	6.26 [6.17,6.28]	6.3%	27.57
GPU	analytic	sparse	6.12 [6.05,6.15]	6.1%	17.48

Table 5: Asymptotic per-frame cost. M: observations/frame, N: spectral components, G: grid size, N_e: ensemble members. ETKF uses the tuned configuration ($N_e = 100$, $G = 40 \times 30$). This table is analytic only. It carried a measured column in earlier versions; those figures were withdrawn as cross-process timings (Appendix A, R3), and the same-process replacement measured since covers our own arm alone and is reported separately in Table 4. We do not place our measured arm beside un-timed baselines in one column, because a reader would read a comparison that was never run.

Method	Per-frame complexity
WaveSplat	$O(K \cdot K_w \cdot M \cdot N)$
ETKF-grid	$O(N_e \cdot G^2 \log G^2)$
GPR	$O(M^3)$

used for the measured records and has *not* been re-measured with the learned renderer, and it covers the steady state after initialisation only, so the proposal stage — four diffusion draws of 500 reverse steps each, plus polish — is not in it. It is a budget for querying a field one already has, not a latency for producing one.

ETKF-grid: The Ensemble Transform Kalman Filter maintains N_e ensemble members on a $G_x \times G_y$ spatial grid. Each update involves FFT-based propagation at $O(N_e \cdot G_x G_y \cdot \log(G_x G_y))$ plus the ensemble transform at $O(N_e^3 + N_e^2 \cdot M)$. The tuned configuration is (N_e=100, G=40×30); see Table 5. No absolute latency is quoted for this arm: the earlier figure was withdrawn as a cross-process timing (Appendix A, R3) and no baseline arm has been re-timed.

GPR: Gaussian Process Regression with M observations requires $O(M^3)$ for Cholesky factorization, making it impractical for dense LiDAR data; kernel hyperparameter optimisation dominates the per-frame cost.

Table 5 summarizes the scaling comparison.

4. Experimental Setup

4.1. Simulation environment

We develop a physics-based LiDAR wave simulation (WaveSim) generating ground-truth wave fields with JONSWAP spectrum sampling [39]. The simulator parameters are:

- **Sea states**: Beaufort 2–5 (H_s=0.3–2.0 m, T_p=4–9 s)
- **Wave complexity**: 1, 2, 5, 15, 30 spectral components with directional spreading ($\pm 20^\circ$)
- **Ground-truth wave model** (Appendix A, R2): The synthetic ground truth is a *displacement-free linear superposition on a fixed grid*: the generator discards the horizontal displacement components of the Gerstner solution, so the ground truth lies in the *same function space* as the estimator's model equation. Nonlinear validation was carried out in a separate higher-order-spectral (M=3) batch, not on this corpus — and that higher-order corpus, which carries the headline ablations, does *not* lie exactly in that space (Section 5.6).
- **LiDAR model**: 500 horizontal beams per scan, 10 Hz scan rate, range 10–250 m. The beam count represents the total number of ray directions per frame (horizontal fan); real-world solid-state LiDARs such as the Seyond Falcon K1 (1550 nm, 152 vertical channels, $120^\circ \times 25^\circ$ FOV) produce comparable or higher point densities per scan
- **Raydrop models**: two return-sampling patterns that differ in how return density is distributed over range and incidence angle. (a) *Geometry-weighted*: retention probability $P \propto R_{\mathrm{Fresnel}}(\theta)\cos\theta/d^2$, so near-range, near-normal facets are preferentially retained. (b) *Unweighted*: each ray hit is retained with equal probability, calibrated to the same expected return count. We retain the historical labels "uniform" and "slope" for these two models for consistency with the released dataset. The second

model was originally specified as a specular-backscatter channel, but that channel is unreachable at the grazing incidence angles of a mast-mounted LiDAR: retro-specular return requires the ray to strike within $\alpha/2 = 2.5°$ of the surface normal, whereas the beam fan spans 78–90° from vertical and wave slopes reach only $\sim 7°$ at BF7. The implementation consequently always takes its unweighted fallback path, which is what we describe and report here. The contrast is therefore a test of sensitivity to the *spatial weighting* of returns, not of diffuse versus specular optics

- **Water depth**: $d = 50$ m (intermediate to deep water for the wavelengths considered)

Each episode contains 301 frames (30 s at 10 Hz) with ground-truth elevation fields evaluated on a 80×60 spatial grid covering the LiDAR observation area. A total of 100 episodes are generated across 5 random seeds per configuration. Each batch reported in Section 5 states its own n and draws its episode set from this corpus or from a corpus regenerated the same way, but the sets are not disjoint: 5 of the batches (B-12, B-16, B-22, M-10, T-4) run the *same* 48 episodes under different arms (Table 6, note (i)). The comparisons are paired per episode and read with a sign test, with the direction and the decision threshold fixed before the runs. The earlier design — a five-metric panel over all 100 episodes, a twelve-episode per-episode breakdown, and a 100-run Wilcoxon validation — belongs to the retracted corpus and is not used here.

4.2. Mesh adequacy of the reference field

The ground-truth elevation field is rendered by ray-casting against a triangulated surface, so the mesh spacing sets an upper bound on the wavelengths the reference field can represent, independently of the wave model that generated it. The originally released episodes used a 40×30 mesh over the observation area, giving a spacing of 6.15×6.90 m. Applying the standard sampling criterion (at least two, and preferably six, mesh points per wavelength) to the true spectral components of each episode, *none* of the released episodes is adequate at its

peak wavelength, and the calmest episodes are the worst affected: a BF2 single-component episode with $\lambda = 8.2$ m is rendered at 1.2 points per wavelength, below the Nyquist rate. Short-wavelength energy is therefore attenuated or absent in the reference field, which both understates the wave content an estimator could in principle recover and inflates the apparent error of any method that recovers it.

We regenerated the full 100-episode dataset on a 200×167 mesh (1.21 m spacing, adequate for every component present), holding the random seed fixed so that the wave components of each regenerated episode are bit-identical to its released counterpart. The two datasets are therefore paired, differing only in rendering. The synthetic batches of Section 5 are computed on this regenerated corpus or on one produced the same way. Three groups of results are not: the non-linear replication, which uses a different reference field and seeds drawn from outside it; the sea-state experiment, which consumes fresh seeds; and every measured-record result, which uses no simulator at all. The effect is strongly regime-dependent: sparse episodes improve substantially (up to −77% nRMSE, with previously undetected short-wavelength components recovered), whereas crowded 15–30-component episodes move much less, indicating that the crowded-regime error is not a rendering artifact. We report this explicitly rather than silently re-running, because two conclusions in earlier versions of this work—a claimed low-SNR failure mode (retracted corpus; archived) and a claimed beamforming detection threshold (Section 6.6)—were attributions of a rendering limitation to physics and to the algorithm respectively.

Tracker phase-advance correction. A second defect, in the estimator rather than the reference field, was found and fixed in the same review, and several tables in this paper carry a provenance note referring to it. The tracking loop advanced each component's phase by $\varphi_i \mathrel{+}= \omega_i \Delta t$ at the start of a frame, while the forward model of Eq. (1) already carries the $-\omega_i t$ term with absolute episode time. The advance was therefore applied twice, so the represented field drifted out of step with the truth at a rate proportional to ω_i even when every parameter was

correct. Removing the explicit advance (the current default) lowers the full-dataset nRMSE, raises the Skill Score and the variance ratio, and reverses the sign of the supplementary directional R^2. We do not quote the levels: they come from a corpus in which the two arms were never scored on the same frames, and only the *within-arm* direction of this correction survives that defect. Because the defect scaled with $\omega_i \Delta t$ it penalised short components hardest, i.e. in the same direction as the mesh inadequacy above—which is why several conclusions in earlier drafts had two independent reasons to be wrong. Tables produced before this correction are individually marked; where a re-run has since been performed we report the re-run and say so, and where it has not we mark the table rather than mix eras silently. We note explicitly that the correction, the mesh replacement, and a move from single-seed to median-of-3 reporting all landed within the same revision, so differences between a pre-correction and a post-correction table cannot be attributed to any one of the three.

4.3. Metrics

We report:

- **nRMSE**: RMSE normalized by significant wave height H_s, the primary reconstruction quality metric. Lower is better; values below 0.10 indicate excellent reconstruction, 0.10–0.30 is good, and above 0.30 indicates significant error.

- **Inference speed**: ms/frame for the tracking phase (defined here for completeness; the measured value for the deployed path is in Section 3.5, and *no timing in this paper is comparable with any baseline* because no baseline arm was timed), measured on a single CPU thread.

- $N_{\mathbf{adapt}}$: final number of spectral components after adaptive model order selection (defined here because the mechanism is described in Section 3; *no value is reported in this paper* — see Section 6.6).

Choice of metric and complementary measures. We use nRMSE as the primary metric in the main results for direct comparability with prior LiDAR wave estimation work [13, 3]. However, we acknowledge that nRMSE alone has a known limitation: a trivial constant-zero predictor on a zero-mean wave field with $\sigma_z \approx H_s/4$ achieves nRMSE ≈ 0.25, so methods reporting nRMSE near this level cannot be distinguished from a flat-output predictor by nRMSE alone. This is particularly relevant when comparing methods that may under-fit (e.g., over-smoothed Gaussian process regression) against methods that capture wave structure accurately.

To address this limitation, we define a complementary *pre-specified metric panel* of four secondary metrics that expose under-fitting and quantify physics-prior contribution: (i) variance ratio VR = $\mathrm{Var}(\hat{z})/\mathrm{Var}(z)$ (amplitude preservation; VR$\ll$1 indicates under-fitting); (ii) Pearson correlation ρ between $\hat{z}$ and z (shape match independent of amplitude); (iii) skill score SS = $1 - \mathrm{MSE}(\hat{z})/\mathrm{MSE}(z_{\mathrm{ref}})$ relative to a zero predictor reference (SS$\leq$ 0 means the method is no better than predicting zero); and (iv) $\mathrm{RMSE}_{\mathrm{unobs}}$, the RMSE evaluated only on grid points that lie at least 10 m from any LiDAR observation (quantifies how well the method reconstructs the wave field where no direct observation exists, isolating the contribution of the physics prior). All five metrics are defined in our public evaluation module. *This paper reports nRMSE as its accuracy metric, plus one exploratory spectral measurement* (Section 5.10) *and the timing of Section 3.5.* The four secondary metrics defined below were part of the retracted corpus's evaluation panel and were not re-measured for the batches reported here, so we describe them for completeness and do not claim a five-metric evaluation. The online model order N_{adapt} is not reported at all; it is discussed in Section 6.6 as a mechanism we do not claim. Each batch's primary metric was fixed before its results existed — in a preregistration for every row but B-1, and in a design note for that one — which is the protection against metric selection that we actually have.

4.4. Baselines

ETKF-grid [23]: Ensemble Transform Kalman Filter on a regular grid with FFT-based spectral propagation, multiplicative and additive inflation, and observation thinning to $M_{\max}$=40 per frame to keep the observation-state projected matrix numerically well-conditioned and bound per-frame computational cost. To avoid penalizing the baseline by an arbitrary parameter choice, we performed a 24-configuration hyperparameter sweep over grid resolution {40×30, 80×60}, ensemble size {50, 100}, and inflation pairs (α, σ) covering the standard ranges recommended in that literature; the winning configuration (g=40×30, n_{ens}=100, α=1.0, σ=0.005) is used as "ETKF (tuned)" wherever an ETKF arm appears. The qualitative structure of the sweep was that the coarser 40×30 grid outperformed 80×60, the finer grid leaving the ensemble undersized for the available observations, and that minimal multiplicative inflation won given the additive inflation already present.

The per-configuration error levels from that sweep are not quoted here: they were measured on the corpus whose cross-arm comparisons are retracted, and no re-measured substitute exists. No ETKF result appears in Section 5; the arm is retained in this section because the sweep is part of how the baselines were chosen, not because a number from it is used.

Spectral-background LETKF (the headline comparator): a localised ensemble transform Kalman filter on the same spatial grid, but with the background error covariance built from a JONSWAP spectrum for the scene's sea state rather than from a generic smoothness prior, a Gaspari–Cohn localisation radius of 25 m, and an ensemble of 600. This is the arm the headline of Section 5.1 is measured against. It was selected, not designed for the comparison: a pre-registered batch compared three localisation radii and a set of alternative background models and took whichever won, and a later batch that attempted to strengthen the family further did not produce a stronger member. We therefore call it the strongest eligible baseline we possess, and not a strengthened one.

GPR: Gaussian Process Regression with Matérn ν=5/2 kernel (length scale

20 m, noise σ=0.02 m), operating in single-frame mode. No temporal model or physics constraints—pure spatial interpolation. This was intended as the best achievable single-frame performance without wave physics, providing a reference for the value of temporal tracking and dispersion constraints. *No GPR result appears in Section 5*: the arm is described here because it is part of how the baselines were chosen, not because a number from it is used — the same status as the ETKF arm above.

5. Results

Scope of all accuracy results in this section (stated 2026-08-14). Every accuracy figure reported below was obtained on a **stationary platform** (the episode generator takes no vessel-speed argument and the sensor origin is fixed), with `direction_deg` = 0—following seas, a geometry in which the waves travel *away* from the sensor, which this repository's own tooling labels as the *anti-causal* configuration for encounter forecasting—and on **synthetic data**. These results are therefore not measured in the encounter geometry of the stated application.

We organize the results around the frozen corpora on which each claim was measured, not around a single dataset. Section 5.1 reports the headline on the crowded stratum, Section 5.2 the non-linear and previously-unused-seed replication, Section 5.4 the two ablations that attribute the gain, Section 5.5 where the gain sits in space and time, and Section 5.6 the scope, including the measured negative.

5.1. Headline: crowded multi-component seas

On the crowded stratum (episodes with $\geq$ 15 wave components), the estimator lowers the median normalised RMSE by -38.6% relative to the strongest eligible grid baseline available to us: it is better on 62 of 64 episodes.

What this number is, and is not. **(1)** The corpus and the reference field are synthetic, and that reference is *linear*; the non-linear case is §5.2. **(2)** The learned checkpoint was trained on the same distribution family as the evaluation

episodes — seed ranges are disjoint, so "out of sample" here means *on the seed axis only.* **(3)** The baseline is the *strongest we possess*, which is not the same claim as *strengthened until it stopped improving.* **(4)** The sparse stratum is not aggregated into this number and does not support it (§5.6). **(5)** *The negative control was not part of the design, but it is recoverable and it is favourable.* The batch's preregistration did not ask whether the comparator itself has skill. The rows it reads do carry a per-episode zero-field reference, however, and re-aggregating them the same way the batch aggregates everything else gives 64/64: the comparator beats a zero field on every crowded episode. The margin in this row is therefore not the comparator collapsing. We mark this as a re-aggregation rather than a pre-registered control, which is why Table 6 shows it in parentheses. **(6)** This batch's gate and analysis scripts were written after its results existed, transcribing rules recorded in its design note; every other row in Table 6 had its analysis frozen first.

Consequently we do not regard this as the paper's strongest evidence. The replication of §5.2 — non-linear reference field, 8 of its 12 scene seeds used by no earlier batch of this project, comparator verified to retain skill on 47/48 episodes, analysis frozen before results — is stronger on every axis on which the two differ, and it is what the abstract and the conclusion lead with. This section reports the earlier and larger corpus first because the rest of Section 5 is built on it, not because it is the better measurement, and we report its two weaknesses in the same breath.

5.2. Does it survive a non-linear reference and scene seeds this project had not used?

The two most load-bearing confounds in the B-1 result are the linear reference field and the reuse of one corpus across many of this project's batches. We removed the first outright by regenerating with a higher-order spectral (HOS, M=3) reference, and weakened the second by drawing 8 of the 12 scene seeds from a range no earlier batch had used. "Higher-order" names what was requested of the generator: 17 of the 48 episodes realise it at second rather than

third order (Table 6, note (i)), which is one reason we do not compare magnitudes across corpora. We are careful about what the second does *not* address: no evaluation seed anywhere in this paper falls in the checkpoint's training band, so "unseen by the checkpoint" was already true of B-1 and is not what distinguishes this batch. What is new here is that these scenes had not been looked at while this project's earlier decisions were being made.

The conclusion holds: 43/48 episodes, median relative change -40.2%, $p = 6.84 \times 10^{-9}$ (one-sided sign test). Each batch's preregistration named the contrasts it would test and divided α among them before any result existed; where two contrasts were named, a confirmatory reading required $\alpha/2 = 0.025$. The win counts in Table 6 are compared against thresholds fixed by that division, not selected after the fact.

Critically, this is a comparison *between two arms that both have skill*: the grid baseline itself beats a zero predictor on 47/48 episodes. A margin obtained against a comparator that has itself collapsed is not evidence about the estimator. We therefore print the comparator's own skill in Table 6 wherever the batch measured it. Five of its rows carry a dash instead, because that control was not part of those batches' designs; for those rows the reader has our word about the comparator and not a number.

We do not compare the size of this number with the B-1 margin: the corpora, reference fields, and realised non-linearity grades differ.

5.3. Is the sensor model doing the work?

Removing the geometric weighting from the return-sampling model — the contrast is between weighted and unweighted returns, not between diffuse and specular optics (Section 4) — leaves the conclusion intact (-42.6% over 20 episodes), and both arms beat the zero reference under both models (Fig. 2).

5.4. What carries the gain? Two ablations

Baseline comparison alone cannot say *which property* of the estimator is responsible. We therefore hold the deployed pipeline fixed and remove one property at a time.

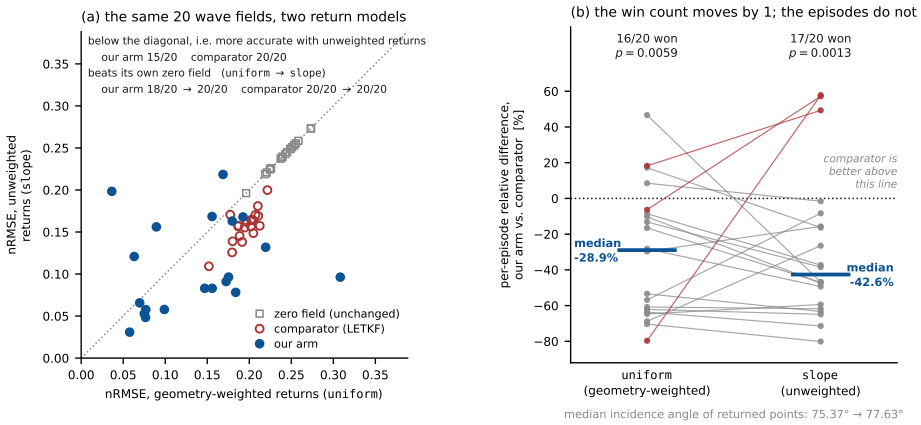


Figure 2: Sensitivity to the spatial weighting of LiDAR returns (B-15). The simulator can retain a ray hit with a probability weighted by incidence angle and range, or retain every hit with equal probability calibrated to the same expected count. The second model's specular gate never fires at this geometry and it always takes its unweighted path (Section 4), so this contrast tests the *weighting* of returns, not diffuse versus specular optics. Both settings write episode files whose wave fields are identical, so this is a paired intervention on 20 crowded episodes with no regeneration. (a) Per-episode nRMSE under one return model against the same episode under the other, each point a median over estimator seeds, with each episode's own zero-field reference. Because the wave field is unchanged that reference is the same on both axes and lies on the diagonal by construction — the visual form of the gate that checked the pairing. *The comparator does not collapse*: it is more accurate without the weighting on every episode and still beats its own zero field 20/20 times there, so the wider margin in panel (b) is not a weakened denominator. (b) The same comparison as a per-episode relative difference; episodes our arm loses are drawn in red. Our arm wins 17/20 without the weighting ($p = 1.29 \times 10^{-3}$, one-sided sign test, median -42.6%). The pre-registered secondary quantity was the *difference in win counts* between the two settings, which fell inside the band fixed before the runs; the shift in median size is descriptive and was not pre-registered. *Read the median as a summary of this sample, not a per-episode guarantee* — the per-episode differences move across most of the plotted range while the win count moves by one. Three limits travel with it. The ground truth here is linear, because the higher-order corpus has no counterpart episodes under the second return model, so this does not stand in for the non-linear result. The intervention is small in what it changes about the returns — both median incidence angles are printed on the figure — so this is not evidence that a large change would be immaterial. And -42.6% is specific to this sample and this return model: the relative margins in Table 6 are not additive and should not be combined arithmetically. Crowded stratum only. Generated from the frozen verdict and rows by `scripts/gen_fig_raydrop.py`, which re-aggregates independently and fails if the two disagree.

The learned prior. Replacing the learned set-valued prior with the analytic proposal package, changing nothing else, removes a margin of -36.3% (45/48, $p = 6.56 \times 10^{-11}$). **Disclosure:** the right-hand side of this contrast is *thin, but it has skill* — the analytic package beats a zero predictor on 32/48 episodes ($p = 1.47 \times 10^{-2}$), whereas the learned package does so on 48/48. This margin is therefore a comparison between two arms that both work, which is what makes its magnitude citable at all; the stronger statement — that the prior is what makes an arm work *at all* — belongs to the single-factor swap below, whose right-hand side does collapse (15/48). $\Rightarrow$ the correct reading is *"the prior is what makes this arm work at all"*, not *"the prior adds a margin on top of a working arm"*.

Continuity of the wavenumber. Snapping atoms to a wavenumber grid removes a margin of -38.6% (46/48, $p = 4.18 \times 10^{-12}$). Both ablated arms retain skill against a zero field (38/48 and 12/16), so the comparator in each case is not empty. The effect is *dose-responsive*: doubling the grid spacing is worse again (47/48). **Both ablated arms still have skill, which is what makes these comparisons readable**: on the same episodes the wavenumber-snapped arm beats a per-episode zero field on 38/48 crowded and 12/16 sparse episodes, so the comparator we beat was not itself empty. **The second rung must be read as a direction, not a size**: the doubled-spacing arm does not itself beat a zero field, on 6/48 crowded episodes and on 2/16 sparse ones, so the distance between it and the first rung is a distance between a working arm and a non-working one rather than a performance margin. We therefore report the direction of the dose–response and not its magnitude. The same ablation reproduces in the sparse stratum (14/16, -67.4%). **That operation is not single-factor, and we measured the second factor rather than assuming it away**: snapping also refits amplitude and phase. A separate batch held the wavenumbers fixed and applied only the refit; the margin it produced differs from the one here by 0.23 percentage points, inside the band that batch fixed in advance, so the margin is attributable to the quantisation rather than to the refit that travels

with it (B-20b).

What these two magnitudes are not. They are not additive, and they are not shares of any baseline margin. The reason is *not* that they come from different corpora — the two ablations run the same 48 episodes — but that each removes a different property and is scored against a different comparison arm, so subtracting one from the other, or from the baseline margin, has no defined meaning. In particular, the B-1 margin and the wavenumber-continuity ablation happen to round to the same figure; those two are measured on different corpora, and the coincidence is arithmetic rather than evidence that the ablation removes the whole gain. We also checked the grid-snapping ablation separately for confounding with the amplitude-and-phase refit it necessarily performs, and found the contribution of that refit negligible.

⇒ Both components that the title names are supported by an intervention inside our own arm, not only by a comparison against someone else's.

5.5. Where is the gain? Locating it in space and time

A margin measured on a synthetic corpus can be an artefact of *where* the corpus places its observations and *when* it scores them. Both coordinates differ sharply between our synthetic and measured data, so we re-scored the frozen crowded corpus along each. Both quantities in this subsection are therefore re-scorings of one corpus — the same 48 episodes that carry the ablations — under different questions, not independent experiments, and they use different comparison arms.

Space. Decomposing the score by distance to the nearest observation, the gain persists inside the density band that our measured records actually occupy — points within 5 m of an observation — on 45 of 48 episodes (-31.7%), with both arms beating the zero reference there (48/48); Fig. 3(b) plots the whole profile. Because every other number in this paper is a win count or a relative median, we give the absolute level here as well: on this band the median nRMSE is 0.043 for the deployed path and 0.063 for the comparator, against 0.339 for a zero

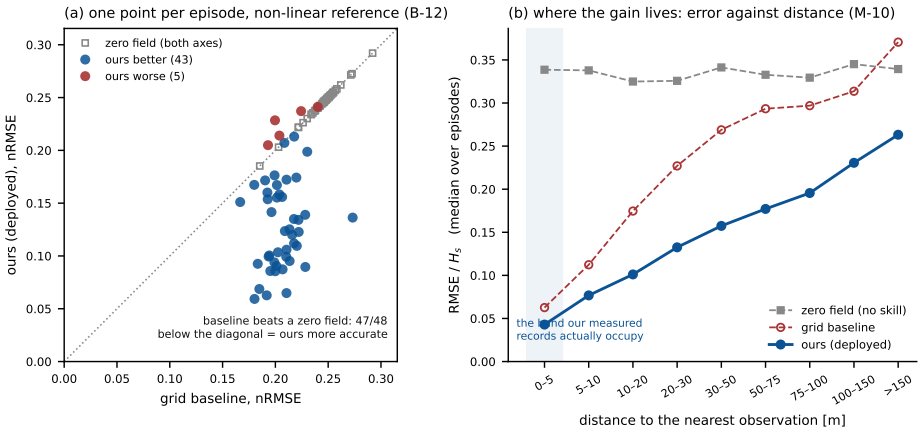


Figure 3: The two comparisons the tables state numerically, drawn. (a) Every episode of the non-linear corpus (B-12): our deployed arm against the grid baseline, one point per episode, each a median over estimator seeds. Points below the dotted diagonal are episodes we win. The hollow squares are each episode's own zero-field reference, plotted on both axes, so the reader can see that *the baseline is not collapsing* — it beats a zero field on 47/48 episodes — and that the episodes we lose are the ones where both arms sit close to that reference. (b) The same deployed arm scored by distance to the nearest LiDAR observation (M-10, crowded stratum, 64-episode corpus). Error grows with distance for both arms and both approach the zero-field level in the outermost shell: the representation buys accuracy where there are observations nearby and progressively less far from them. The shaded shell is the density band our measured records actually occupy, which is why Section 5.5 reports that shell rather than a domain average. **Disclosures.** M-10 was *not blind* — its preregistration recorded the expected direction before the runs, and a smoke subset had already shown it. The shell boundaries are absolute distances, not multiples of the peak wavelength, and the corpus mixes two sea states whose peak wavelengths differ by a factor of 1.65; *this figure is an exclusion, not an attribution*, and aperture, incidence angle and occlusion remain unmeasured. Both panels are synthetic and crowded-stratum. Generated from the frozen verdicts and result rows by `scripts/gen_fig_estcompare.py`, which re-aggregates independently and fails if the two disagree.

field. These are medians over the crowded synthetic stratum and should not be read as a level for any other corpus. This is an *exclusion*, not an attribution: we did not run an equivalence test, and aperture, incidence angle, and occlusion remain unmeasured. Not blind.

Time. The synthetic margins are scored at assimilation time; our measured judgements are scored at forecast lead. Re-scoring the same frozen corpus at a forecast rung gives 47/48, -46.3%. **Two disclosures are mandatory here.** First, that rung is at the *lower* end of the measured lead band: the precise statement is *"a rung covered by* 11 *of the* 12 *measured records"*, not *"the same horizon as the measured data"*. Second, **the comparator degrades across the same interval** — the grid baseline beats the zero reference on 47/48 episodes at zero lead but only 34/48 at the reported rung, while our own absolute error *worsens*. ⇒ the growing ratio must not be read as *"we get relatively better at longer lead"*. Not blind.

The two magnitudes in this subsection answer different questions on different re-scorings of the same corpus and have no defined meaning relative to each other: they should not be compared, added, or subtracted, and neither is a decomposition of any baseline margin.

5.6. Scope, stated as measured

Against the deployed analytic package, the sparse stratum does not separate. With that package's ensemble intact, the learned package wins 55/64 crowded episodes (-44.8%) but only 28/64 sparse ones.[2] The win count is not distinguishable from chance; the point estimate (+21.4%) is a substantial *loss* and we do not read the null as equality. We therefore do not write *"the learned prior wins in every regime"*. **The comparator is not weak here, which is what makes this a result.** On the same episodes the analytic package beats

[2]The crowded count here coincides with the S-ENS crowded count in Table 6, which is a different contrast on a different corpus (-17.9% there against -44.8 here). Both reproduce from their own frozen rows; the coincidence is arithmetic.

a zero field on 62/64 sparse episodes, against 50/64 in the crowded stratum. The sparse non-separation is therefore not the artefact this paper warns about elsewhere — a margin, or the absence of one, produced by a comparator that had no skill to begin with. It is the opposite case: the thing we do not beat is the thing that is doing best.

Disclosure: these figures come from a re-aggregation of the frozen rows of the deployment-verification batch W-15, not from a pre-registered contrast, and they do not appear in that batch's verdict file — the `sparse` entry there records a different comparison. Two further caveats travel with them. The zero-field reference is per-episode and comes from a *different* batch (the same source W-15's own gate file uses), so the control is assembled across two batches even though the episode sets are identical. And W-15's corpus is a linear-reference deployment corpus, not the higher-order corpus of the ablations, so the contrast with B-19 in the next sentence differs in comparator *and* in corpus. This is a statement about one comparator on one corpus and does not transfer: against the wavenumber-grid ablation, on the higher-order corpus, the sparse stratum *does* separate (B-19, 14/16, Section 5.4). We report both and collapse neither.

On measured data the learned prior does not reach the decision threshold. Across 12 fixed-station stereo records, and under every arm configuration we tested — including giving the learned representation the same median-of-k field ensemble that the deployed real-data path uses — the learned prior does not reach the pre-registered threshold against a per-record zero-field reference. The ensemble treatment does move the endpoint, and it lowers error by a confirmed margin, but it does not cross the threshold. We report this rather than omit it; a full treatment of the operating boundary — including what has been excluded and what remains unmeasured — is the subject of a companion thesis. We do not claim to know why the transfer fails.

One asymmetry runs through every measured comparison of this form. The window the estimator observes and the window it is scored on are de-meaned separately, per pixel, which leaves a static spatial offset between them worth 0.05–0.29 of the record's standard deviation. A fitted wave field is

a sum of travelling components and cannot represent a static pattern, so that offset is an irreducible error floor for any arm that fits; the zero-field reference, being identically zero, does not carry it. Every *arm-versus-zero* statement about the measured records is therefore biased against the arm. This does not weaken the negative — it means the negative is partly a property of the scoring convention, and that a positive obtained under it is conservative. The *paired* comparisons between arms are unaffected, because both arms are fitted to the same observations and inherit the same offset.

We repaired that convention and re-scored; the verdict holds. The repair de-means the scored window with the observation window's own per-pixel mean. It was chosen before any arm score was computed, on two criteria that depend only on the definition of the ground truth: the true field must score zero, and the lead-zero target must not depend on how far ahead a batch chose to score. Under it the deployed arm beats the per-record zero field on $11/12$ records ($p = 3.17 \times 10^{-3}$), against $10/12$ under the biased convention; the learned representation moves from $7/12$ to $8/12$ and still does not reach the pre-registered threshold of ten. The deployed arm's $11/12$ should be read with the support condition below: on these records the query points sit a few hundredths of a wavelength from the nearest observation, and when the observations are confined to half the box the same arm keeps skill on only $8/12$ of them — though that reduction does not reproduce in the stratum with the most query points (3 of 5), so we state both. The repair is not a favourable one. The median comparator shift is $+0.3\%$; all but one of the 12 records move by less than three percent in either direction; and on four of them the comparator becomes *stronger*, which makes it harder to beat. One record carries the whole change ($+49.0\%$), and it is the same record whose lead-zero target is most sensitive to the scoring-window length — the two defects are largest in the same place. The repaired scoring is not blind: the counts under the biased convention were known when the batch was frozen, and the design cannot reach a confirmatory grade under its own stated prediction, so we report it as exploratory.

An external baseline, and it does not flatter us. Until today this paper reported no external baseline on the measured records, and recorded that absence as a measured state: two attempts failed their own self-test. That is no longer the situation — **for one of our two arms**. *Which arm was compared matters, and we state it plainly*: on ground-truth-free input the deployed router sends every window to the ported bank-MMSE estimator, so the arm that faced the third-party method is the *deployed comparator*, which this paper does not claim as a contribution. **The learned prior — the subject of this paper — has still never been compared against an external method**, and the reason is now measured rather than asserted: reaching it on measured input requires deliberately disabling the real-domain gate. We ran a third-party reconstructor — published code under GPL-3 with the authors' own pre-trained weights, neither their code nor ours modified — on the same twelve records, and swept the observation budget.

The robust result is the ladder rather than the contest. At the density our deployment geometry actually supplies, twelve points per frame, that method clears a per-record zero field on 0/12 records; at two hundred points per frame it clears on 7/12, and at four hundred on 10/12. *The budget at which an external reconstructor begins to have skill on these records lies between two and four hundred points per frame, and our sensing geometry delivers twelve.* That converts a limitation this paper previously asserted into one it measures.

The same measurement on the synthetic corpus that carries the headline ablations says the same thing more sharply. Fed the stored LiDAR returns of those episodes exactly as generated — a median of 148.5 stored returns, of which 138.5 reach the rasteriser because a fifth of the centre frame is withheld to choose a sign convention without ground truth — the external reconstructor clears a per-episode zero field on 0 of 48 episodes, with a median error of 2.085 against the zero field's 0.998: at our sensing density it is twice as bad as predicting nothing. Given 48 of 48 at two hundred samples per frame, the onset again sits between our density and a few hundred samples. *Three conditions are essential here*: the upper rungs sample the ground-truth field rather than a sensor, so

they are a ruler for the threshold and not a claim that such observations are obtainable; this comparison does not run our own arm, so it says nothing about which method is better; and — the condition an adversarial re-reading of this batch raised against us — the ladder is not a one-factor density axis. The rungs sample uniformly over the scored domain, whereas the deployed returns occupy a bounding box covering a median of 12.6% of it across the three frames the reconstructor consumes, and 7.0% in any single frame; inside that single-frame box their local density is 3.6 times the two-hundred rung's global density. (The per-frame convention is the one to compare against a per-frame rung; the three-frame union is the one that bounds coverage.) The vendor's own pipeline masks its output to the camera-visible region, and we score the whole domain unmasked, which pushes in the same direction. What the deployed arm lacks at the scored scale is therefore coverage at least as much as density, and the separating experiment — uniform samples confined to the same footprint — was cheap and was not run. The number quoted above should be read as the onset for *this observation geometry*, not as a threshold in points per frame.

The head-to-head must be read with the budget convention attached, because the two methods consume observations differently: our arm accumulates twelve points per frame over a forty-second memory window, while theirs sees three consecutive frames and cannot use a history. At *equal total budget* — six hundred observations each — the deployed arm is better on 6/12 records, which is a tie, and at that budget the external method does not reliably clear a zero field (7/12). At the lowest budget where it does clear, it is receiving twice our observations, and there it beats the deployed arm on $12 - 2$ of 12 records ($p = 1.93 \times 10^{-2}$). Our arm beats a per-record zero field on 11/12 records throughout, to be read with the support condition stated below — confined to half the box, that same arm keeps skill on only 8/12. Three further conditions travel with the comparison: their input spans $t-1, t, t+1$ and therefore sees a future frame, which favours them; their dense output is resampled onto our query grid by nearest neighbour; and the training distribution of their checkpoint could not be read from the publisher, so its relation to these sites is

unknown.

Two things must be read with that p-value. First, this arc records a sixteen-arm Holm family whose smallest threshold is $0.05/16 = 0.0031$; the repaired p moves the deployed arm from 0.0193 to 3.17×10^{-3} and still does not cross it, so the statement that no arm on the measured records survives the multiplicity correction is unchanged. Second, the sign test treats the twelve records as independent, and they are not: they come from four sites and ten calendar days, with three records drawn from a single afternoon. Folded to days the count is 9/10 ($p = 0.011$); folded to sites it is 4/4, whose p is 0.0625 — the floor, so at site level $\alpha = 0.05$ is unreachable by construction. The result survives the day-level fold and we report the record-level number as the pre-registered one, not as the strongest one.

This construction is the field's, not ours alone. Validation practice in phase-resolved wave reconstruction spans a narrow spectrum: purely synthetic references; wave-tank experiments whose dense truth is assembled by exploiting repeatability across runs [13]; field campaigns scored against the same sensor's later frames because a true solution is unavailable; and field observations checked against independent *point* sensors at the level of spectra and scalar statistics. A dense, field-scale reference that is independent of the observing sensor does not, to our knowledge, exist anywhere in this literature — even the stereo surfaces used as ground truth trace their own validation to centimetre-level comparisons against point gauges. **We ran that point comparison ourselves and report the number.** On the seven records for which a co-located wave-gauge array exists, the stereo surface carries more variance above 1 Hz than the gauges do on 7/7 records ($p = 7.81 \times 10^{-3}$), by 12.8–129.0 mm RMS (median 56.9 mm). That is an *upper* bound on the reconstruction noise floor for one reason only: the gauges sample a different point of a spatially inhomogeneous field. Their own noise enters the subtracted term and therefore pushes in the *opposite* direction, so we do not offer it as support. It does not make the surfaces a validated dense reference — the gauges are six sensors within a 0.25 m radius, 7–11 m from the scored grid, so no per-gridpoint error field follows. Two conditions travel

with the number: the comparison rests on the gauges being far enough from the scored grid that no positional correspondence is usable, and *that* premise is asserted here rather than established: the search we ran to test it swept lags of ±20 s while the two instruments' record clocks are offset by 400–1046 s, so it never visited the true alignment. A re-check at the true offset leaves the conclusion standing but the pre-registered evidence for it does not. The surrogate null we used is justified by the gauge series being near-Gaussian, which we measured rather than assumed: across the seven records the gauge skewness spans −0.784 to 0.095 and the kurtosis 2.979 to 3.492 (Gaussian: 0 and 3). We print the ranges rather than a count of records that "pass", because any such count needs a normality threshold we would be choosing after seeing the data; the lower skewness bound shows the premise is not uniform across records. The closest competing study evaluates on one of the same public stereo records we use, takes that dense reconstruction as its ground truth, and additionally subsamples it synthetically [23]. What is specific to us is one further synthetic layer: our sparse pattern follows a simulated scanning-LiDAR geometry rather than the sparse output of a real stereo matcher, and our records come from fixed stations rather than a vessel. We state that asymmetry rather than let the shared convention excuse it.

5.7. Running the estimator on a third party's ground truth

The accuracy comparison that the phase-coupling test of Section 6.6 leaves undone has now been run, and it is negative. From the same third-party archive (12.8 GB, 40) we drew 24 simulation blocks, disjoint from the blocks a design audit had already opened, and gave the deployed learned arm 200 observations per frame over a 40 s window, scoring the archive's own elevation field at the last observed frame. Against a per-block zero field the deployed arm is better on 8 of 24 blocks, against a decision threshold of 17 fixed before the runs; the same batch records that the count is not significantly *worse* than chance either. The smallest true win rate the design could resolve is 0.7600, so the reading is that the arm does not reach the threshold, not that

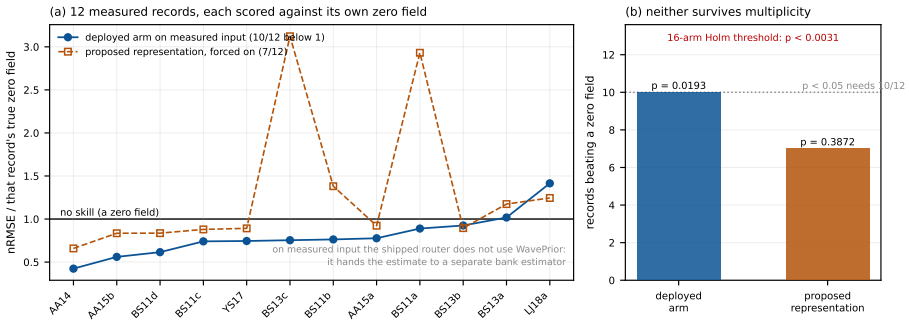


Figure 4: The measured records, scored the way the correction of the scoring reference requires. Each of the 12 fixed-station stereo records is divided by *its own* true zero-field error rather than by a constant: that constant was found to be wrong, and the per-record values span more than a factor of three, so a single reference silently rescales the records against one another. A value of 1 is the error of predicting a flat sea. Panel (b) counts the records each arm places below that line and marks the threshold that the multiplicity correction for this arc imposes; the deployed arm reaches ordinary significance and neither arm reaches the corrected threshold, which is why the text reports no skill rather than a small one. Two things must be read with the figure. First, the arms are drawn at the corrected water depth, taken from the batches that already contain that configuration; the records the correction cannot touch are bit-identical between the two depths, which is what makes the pairing legitimate. Second, and more important for this paper's title: *on measured input the shipped router does not use the learned prior at all* — it hands the estimate to a separate bank estimator, and the "proposed representation" arm is that prior switched on by force. The two arms are each scored against their own zero-field reference and are not compared to one another here, because the paired margin between them has been corrected twice and is not a quantity this paper cites. *One asymmetry must be read with the counts.* The observation window and the scoring window are de-meaned separately, per pixel, so a static spatial offset of 0.05–0.29 of the record's standard deviation stands between them. A fitting arm cannot represent that offset and carries it as an error floor; a zero predictor, which predicts nothing, does not. Both counts are therefore biased *against* the arms: what survives is conservative, and a reading of "no skill" is helped by the artefact rather than hindered by it; on the single record where that floor is largest it accounts for most of the scoring reference, and that record is also the one counterexample in the paired comparison, so we do not build any statement on it alone. Section 5.6 reports the same counts under a repaired convention, where each arm gains exactly that one record and the learned arm still falls short. *Three further conditions.* The scored points are a 4 m subsample of the same grid the observations are drawn from, but no scored value was ever handed over as an observation, and a nearest-neighbour interpolator using that proximity clears the zero-field reference on none of the records — what is scored is a space-time model, not an interpolation. The scored instant is the right-hand endpoint of the observation window, so this figure is a reconstruction, *not* a forecast. And the multiplicity threshold drawn in panel (b) counts sixteen arms, of which six are bit-identical repetitions; on the ten distinct hypotheses the threshold is looser, and neither arm crosses it either way.

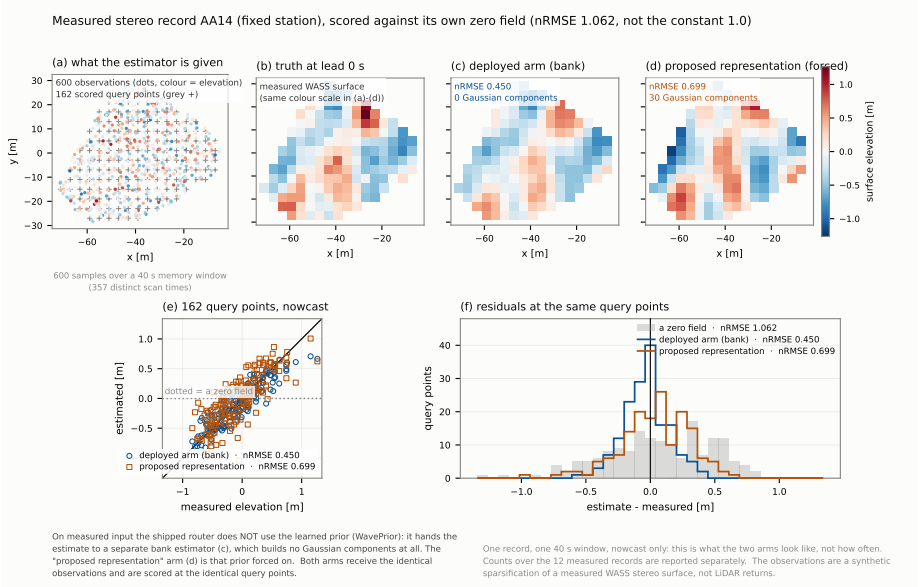


Figure 5: What the two arms actually produce on one measured record, so that the counts in Fig. 4 have a picture attached. Both arms receive the identical observations (a) — a sparse sample of a measured stereo surface, not lidar returns — and are scored at the identical query points against the measured surface (b). The deployed arm (c) builds no spectral components at all: on measured input the shipped router does not use the learned prior, and hands the estimate to a separate bank estimator. Panel (d) is that prior switched on by force. Panels (e) and (f) show the same two estimates at the query points, with a zero field drawn as the reference each is scored against. *This is one record, one window, and the nowcast only:* it shows what the arms look like, not how often. The record was chosen because the water-depth correction does not touch it, which is what allows the figure's numbers to be checked bit-for-bit against the frozen batch; it also sits in the easier of the two spatial strata. The ratio of the two errors here is not a result — the paired margin between these arms has been corrected twice and is not a quantity this paper cites.

it has been shown to have no skill.

Two further arms on the identical observations turn that negative into an attribution rather than a dead end. The first is an oracle handed the true wavenumbers, fitting only amplitude and phase by least squares. It is not an estimator and cannot be deployed; it bounds what the observations contain. It beats the same zero field on 24 of 24 blocks. The sparse returns therefore carry the field, and what fails is the placement of the atoms rather than the sampling.

The second arm relabels the coordinates: $x' = x/s$, $y' = y/s$, $t' = t/\sqrt{s}$ with $s = 2$, which multiplies every wavenumber by s and every frequency by $\sqrt{s}$ and therefore leaves $\omega = \sqrt{gk}$ exactly satisfied. *No sample is altered; the same numbers are read in different units.* Under it the same deployed arm beats the zero field on 24 of 24 blocks ($p = 5.96 \times 10^{-8}$). **That is a thought experiment about units, not a performance figure and not a deployable configuration**: s was fixed at 2 before the runs and no rule chose it from the data. What it licenses is exactly one attribution — the boundary lies in the *absolute-scale design range* of the deployed estimator and not in the information content of the observations. **It does not identify the wavelength band of the learned prior as the cause**, and the obvious version of that reading is measured to be wrong: the blocks' peak wavenumber already sits inside the prior's training band.

A second batch asked which part of the estimator that relabelling was standing in for. On the same 24 blocks it halved, one arm at a time, the absolute wavenumber scale of exactly one subsystem of the deployed path — for some arms that is one constant and for others, including the one that reproduces the effect, it is the several constants that define that subsystem's scale together — while leaving every other shipped value in place, each intervention applied through a context manager and read back from the live object. One arm reproduces the effect: rescaling the conditioning map's own wavenumber extent together with the prior band it is read against beats the zero field on 24 of 24 blocks ($p = 5.96 \times 10^{-8}$), and on 28 of 28 blocks held out from that sample, re-

covering a median 0.507 of the relabelled arm's gain. **The canonical reading is the absolute scale of a single subsystem, not a single constant**: that one intervention moves the map's cell size, the prior's band and the refinement step together, and the batch recorded that co-movement before it was run.

The label the batch printed is nevertheless that more than one axis carries it, and it is one block from flipping. Of the 8 secondary axes, the map cell on its own reaches exactly the family threshold at 19 of 24, and that threshold is 19: a single block in the other direction would have printed the single-axis label instead, so we quote the label with that fragility attached. The other 7 of the 8 do not reach the threshold, and that is a statement about power rather than about those axes being inert — the smallest true win rate this family could resolve is 0.8332. One of them is worse than under-powered: halving the growth separation threshold leaves the estimate bit-identical to the shipped arm on all but 6 of 24 blocks, so its 9/24 is largely a reprinting of the shipped arm's own count, and it is a candidate for insufficient leverage rather than for no effect.

That confirmation sits on an exposed sample and we grade it accordingly. The four anchor arms on those 24 blocks were already known when the batch was designed. The nine treatment arms had never been run on them and the axis list was frozen in the earlier batch before any result row existed, but the relabelling factor itself was chosen with the earlier outcome in view. *We do not call this an independent confirmation, and it is neither blind nor out of sample.* The held-out complement is exploratory for the same reason it is useful: its sea states are shifted upward relative to the primary sample. None of the treatment arms is a shipped configuration, so no arm winning here is a recommendation to change a default.

One concrete implementation defect was repaired, and the repair is not detectable. The conditioning beamformer builds its matched-filter grid from a module-level water depth that the configured depth never reaches, so on a deep archive that grid is mismatched across exactly the blocks' energy band. A third batch repaired it — the map depth taken from the estimator's own

configured depth, every other shipped value untouched — and scored 52 paired blocks. The repaired arm is better on 26, against a threshold of 33. **Read that as undetected and not as exoneration**: the smallest true win rate the design could resolve is 0.6795, so it does not establish that the depth mismatch is harmless. What makes the reading tighter than a bare null is a negative control fixed before the results. Repeating the same repair on the relabelled arm, where the map is already matched and the repair should be close to a no-op, gives a perturbation floor of 0.0366 in median absolute relative terms, while the treatment's own median relative effect is -0.000148 — inside that floor by more than two orders of magnitude. The repair is a harness intervention and is not in the shipped package; nothing here recommends adopting it.

Half of that batch is not new data, and we say so rather than let the count suggest otherwise. All 24 rows on the primary blocks are bit-identical to the corresponding arm of the isolation batch — the same treatment, the same seeds, run twice — so the honest decomposition of 26/52 is 10/24 re-read plus 16/28 new. *The two batches did not reach that conclusion independently*, and an earlier statement of ours that they did is withdrawn. The reading is the same on either half. On the 28 held-out blocks the deployed arm's own negative reproduces under three estimator-seed conventions across the three batches (8, 6 and 10 of 28).

A fourth batch asked whether the scale can be chosen from the observations alone, and it did not get to answer. Two ground-truth-free rules were frozen before any run — one from the observation aperture, one from an estimated peak wavenumber — together with an equivariance gate asking whether each rule transforms as a scale rule must when the scene itself is rescaled. *The batch is blocked*: its gate tally is 31/32, and the gate that does not pass is G-EQUIVAR, which its pre-registration had made a blocking gate, so the batch **prints no label** and we quote from it no arm count, no recovery fraction, and no comparison between the two rules. The failure is diagnosed rather than argued: the band rule's first zoom stage uses an absolute wavenumber grid, and on this archive the peak wavenumber sits at a median of 1.16 of that grid's

spacing over 34 blocks, with a minimum of 0.88 — below one, meaning the rule's own instrument cannot see the peak it is asked to measure. For that batch's primary contrast the smallest resolvable true win rate would have been 0.7630, so nothing about automatic scale selection is established in either direction.

Two things that batch does establish, because they are gates and not arm counts. The scale rules were re-executed in a separate process given only the observation arrays, and reproduced their values bit for bit — 0/68 mismatches — so they do not read the ground truth. And the two paths that carry atoms back from relabelled coordinates into the original units — the implicit one and an explicit inverse — agree within a tolerance fixed in advance, at 0/176 mismatches. *A deployable path that emits atoms in the original units therefore exists and works*; what is missing here is a scale rule that passes its own equivariance test, and that is a different rule requiring its own pre-registration. Such a rule was subsequently pre-registered and measured, in Section 5.8; that does not change this batch's status, which remains no label.

Four conditions travel with all four of these batches. They run on one third-party archive at a single peak period, so this is a statement at one wave period; the archive ships no documentation naming its solver, so we do not call it higher-order or fully non-linear, and its numbers are not comparable with the published figures of the study that released it. **There is no external baseline arm anywhere in the four**: every contrast is our own arm against a zero field or against another configuration of our own arm, so nothing here says that any method is better than any other, and the whole arc is attribution. For the same reason these results are not comparable with the external-baseline measurements of Section 5.6, which ask a different question on different corpora, and we do not read the two against each other. The proposal stage consumes a capped subset of the observations the window supplies rather than all of them, so "a chosen subset" and "everything available" are not the same budget; and wall-clock timings are not compared between arms in any of the four, because the arms do not use threads the same way. In the first batch some checks were added after its results existed; they can block a label but cannot create one, and

that batch records them apart from the gates frozen beforehand.

5.8. Moving that scale at home, and choosing it without ground truth

The attribution above invites two immediate questions. If the boundary is the absolute-scale design range of the deployed estimator, why not simply move that scale? And can the scale be chosen from the observations after all, by a rule that survives the equivariance test the fourth batch failed? Two further pre-registered batches answer them. **Both answers are constraints on deployment rather than gains, and we report them here for that reason.**

Moving that scale costs on our own corpus. The same intervention that restores the result on the third party's fields — dividing the conditioning subsystem's absolute wavenumber constants by a factor f, with $f = 2$ being exactly the arm that reproduces the effect there, and with the constants imported from the isolation batch rather than retyped — was applied to our own corpus of 128 blocks with every other shipped value left in place. In the crowded stratum the treatment is *worse* than the shipped arm: it wins on 23 of 64 blocks, which is **exactly the harm threshold** 23 that was fixed before the runs ($p = 0.016383$). In the sparse stratum nothing is detected ($31/64$, $p = 0.45$). The positive control replicates in both strata (63 and 63 of 64); gates 22/22 over 832 rows. The label the batch printed is `HOME-REGRESSION`. *We quote that count at the precision the batch computed it*, because it meets its threshold rather than clearing it, and a count one block in the other direction would have printed a different label.

No factor we swept recovers it, and the penalty is not monotone in the factor. Three further arms swept $f \in \{\sqrt{2}, 2\sqrt{2}, 4\}$ on a 32-block substratum of the same stratum, where the primary treatment $f = 2$ also ran. On those 32 blocks every factor is worse than the shipped arm in median relative terms — $+14.1\%$ at $\sqrt{2}$, $+8.3\%$ at 2, $+22.9\%$ at $2\sqrt{2}$ and $+31.0\%$ at 4, winning on 12, 14, 11 and 9 of 32 — **but that ladder is not monotone**, and the arms' own absolute medians do not order the same way as the median of their

paired relative differences. *No dose–response test was pre-registered and we do not claim one.* The $f = 2$ entry is a *re-aggregation* of the batch's frozen rows onto this substratum and does not appear in its verdict; the other three are the verdict's own. *These arms do not run on the primary sample*, so the sweep is a curve within its own substratum and we do not read the primary count into it, nor extrapolate it to the full corpus.

What this establishes is a direction, and the size is barely separated from the batch's own noise. The same runs measure an intervention floor: a second intervention on the same code path, applied and read back the same way and reported by the isolation batch as not reaching its threshold there, gives a median absolute relative deviation of 10.6%, against the treatment's median relative penalty of +12.2%. That equivalence test was fixed before the results and the effect does fall outside the floor, but only just. *So we quote the sign and not the magnitude.*

That floor is borrowed, and it does not hold everywhere in this corpus. The arm supplying it was measured as a null in the earlier batch on a different corpus, not here. In the crowded stratum, where we use it, it reaches neither decision threshold (28/64); in the sparse stratum the same arm reaches the batch's own *help* threshold exactly (41/64, threshold 41), at the same p that produced the crowded label. *So the floor is a floor in the stratum we quote it in and demonstrably not one in the other*, and a reader who declines to treat it as a noise scale is left with the sign alone — which is the part we rely on.

Five disclosures travel with that negative. (i) The factor here scales *internal constants*; the relabelling of the previous subsection scaled the *data's coordinates*. They are different operations and we do not write them with the same symbol. **(ii)** This corpus is the learned checkpoint's own **training envelope** — its sea states and component counts are those the prior was trained on — so the result is *not out of sample, not held out and not blind*, and it cannot be separated from the statement that home is where the prior was trained. **(iii)** The pre-registration was departed from: a smoke run touched 2 of the 128 judged blocks, so their treatment values were seen before the main run, and in

the crowded one the direction was the *opposite* of the registered prediction. We changed neither the prediction, nor the sample, nor the thresholds, and we do not offer the size of that exposure as mitigation. **(iv)** A *partial aggregate* was also read while the main run was still in progress. At that point 30 blocks had finished, all of them in the crowded stratum — 30 of the 64 that decide that stratum's label, not 30 of an undivided 128. *We record all three counts that were visible*: the primary statistic stood at 14 of 30, the positive control at 29 and the floor arm at 16. Nothing could act on them — the sample size is fixed in the pre-registration, the runner has no early-stopping path, and the analysis code was frozen by checksum before any row existed — but this project's rule is that aggregation is frozen before results *and that what was seen is written down*, so we write it down; they support no conclusion. **(v)** The sparse null is a statement about power, not about safety: the smallest true win rate this design resolves at 80% power is 0.3185, and counts between 24 and 40 inclusive reject neither threshold, whatever the data. No treatment arm in this batch is a shipped configuration, and **there is no external baseline arm** here either.

The freezing statements in this subsection are about these two batches and not about every measurement in this paper. Both froze their measurement side by checksum before any judged row existed, and both amended their analysis side afterwards while the judged sample was still empty; in this batch that amendment only *added* gates, and the exception is the second batch's single gate tolerance, which was loosened and which we state as such below. The paper-wide exception — the one summary-table row whose gate and analysis scripts were written after its results existed — is recorded in Section 5.9.

Choosing that scale without ground truth is now possible, and what it buys is well-posedness. The batch that first tried to choose the scale automatically was stopped by its own equivariance gate. A repaired rule — one that sets the first zoom stage's search radius from the observation aperture rather than from an absolute wavenumber constant — clears an equivariance gate of the same kind: 0 violations at a tolerance of 10^{-6}, in the halving and the doubling direction

alike. *That gate is re-specified rather than inherited*: the earlier batch applied its tolerance in the doubling direction only, and the two batches score the deviation in different conventions, so this is not the earlier test re-run and we do not report it as one. On 60 blocks of the same third-party archive on which no earlier batch in this arc had been run, it beats a per-block zero field on 59 ($p = 5.29 \times 10^{-17}$) against a threshold of 39 fixed before the runs, with the positive control at 60/60 and gates 46/46 over 366 rows. On those same blocks the shipped arm is not merely below its own threshold: it is *significantly worse* than the zero field (16/60, against a pre-registered significantly-worse threshold of 21). *The counts of these batches are not comparable with each other* — they run on different file sets with different sea-state compositions — so that is this corpus's own negative and not a sharpening of an earlier one.

The design expected both of these before the runs, and said so. Its frozen prediction put the skill axis at near-certainty and gave this exact landing label a prior probability of 0.937; neither outcome below is a surprise the data sprang on us, and we print the prediction so that it cannot be re-described after the fact.

Two things that result does not say, both fixed before the runs. First, *the skill is not attributable to the repair*: the rule the repair replaces also beats the zero field on the same blocks (58/60, against an uncorrected threshold of 37), so what the primary axis establishes is that an automatic scale earns skill, not that this particular repair does. Second, *no difference between the two rules' landing points is detected*: the repaired rule is better on 25 of 60 blocks, reaching neither side of the exclusion threshold 40 fixed before the runs (two-sided $p = 0.245$), and the quantity that drives that axis is smaller than the ruler it is measured against — the median absolute log difference between the two rules' chosen scales is 0.0256, with 39 blocks in one direction and 21 in the other, against $\ln 1.05 = 0.0488$. **Read that as the treatment sitting below the scale of the ruler, not as the repair being pointless**: the smallest true win rate the landing axis resolves at 80% power is 0.7074 (the skill axis, 0.6915), and the case for the repair is a well-posedness property — the rule it

replaces searches on an absolute grid whose spacing does not follow the scene — rather than accuracy on this corpus. That old rule's own equivariance is recorded without a tolerance and is direction-dependent, at a median deviation of 0.993 when the scene is halved against 0.027 when it is doubled; both are in the analyser's convention, which is not commensurable with the convention the earlier batch's gate used, so we do not set them beside that gate's number.

What this batch does not measure. It is *a statement about a landing point and not about adaptation*: every file in this corpus shares one grid and one observation aperture, so the quantity this rule reads is a corpus constant and the data cannot distinguish the rule from a suitably chosen fixed one. What distinguishes it is behaviour rather than fit — the rule was re-executed in a separate process given only the observation arrays and reproduced its scales bit for bit, and its first-stage radius moves exactly with the scene under relabelling — so we do not describe it as having no free parameter on the strength of this measurement. It is *not a deployment recommendation*: a positive label is one necessary condition among several, with cost per call, the effect on the measured-data path, and harmlessness on our own corpus all outstanding, and the batch above returned a negative on the last of those. It is *not fully blind*: the designer had read the stopped batch's amendment and the two anchor files' values before fixing these thresholds, and *attributes* of 36 of the 60 judged blocks — the non-linearity and dispersion attributes of their ground-truth fields, not their errors — had been read by an earlier batch, and that is information adjacent to performance rather than inert; the weaker true claim is that all 60 were blind to *outcome*. **One gate's tolerance was relaxed**, before any judged row existed, and we state it rather than let the gate tally imply otherwise: a smoke run failed the gate asking whether the two grid axes span the same aperture, because that gate compared an absolute length where the question is a ratio, and it was rewritten as a dimensionless ratio at 10^{-4} against a measured asymmetry of 3.23×10^{-6}. *This is a blocking gate, so a reader who does not accept that argument is declining the batch's label and not merely one line of its tally*; we say so rather than offer the gate as detachable. The rule's target

constants come from *our* training distribution, so the rule moves a scene to where our prior was trained rather than being set by the third party's data. **It says nothing about the measured records**: the code path it modifies is not the one the shipped configuration takes on ground-truth-free input. *The gate tally is not a strength measure*: several of those gates are structurally true given the shipped constants, and the batch says so itself. *What the gates measure is equivariance and grid margin, not robustness* — the repair lowers the first search stage's floor, which can fail to cover a low enough peak wavenumber, so we do not describe the repaired rule as the more robust one. *And the scale is not a single factor*: moving it moves the prior band, the de-duplication threshold, the growth block and the refinement step together, so no mechanism inside it is singled out here. One of those couplings is *asymmetric in the direction the rule moves*: the conditioning beamformer's water depth is a module constant the configuration never reaches — the same defect the third batch above repaired — and enlarging the scale also shrinks that mismatch, so on this archive the two cannot be separated. And as above, **there is no external baseline arm** in this batch, which used a single estimator seed.

What the pair does to the argument. Together they sharpen the attribution rather than widen a margin. The absolute scale that a third party's fields expose does not behave like a free parameter we merely set wrong: moving it towards the third party's scale is measured to cost on the corpus the prior was trained on, at every factor we swept. *That the constant is therefore* calibrated *to that distribution is our reading of those measurements and not itself a measurement*, and it is not separable from the fact that home is the training distribution. And the piece the earlier arc was missing — a scale rule that survives its own equivariance test — now exists, but what it has been shown to buy is well-posedness together with skill against a zero field on one third-party corpus, not accuracy over the rule it replaces, and nothing at all on the measured records.

5.9. Summary of the measurements this paper rests on

Table 6 and Table 8 collect every comparison this paper relies on for its accuracy claims, and Fig. 7 plots the first of them with exact confidence intervals alongside each comparator's own skill. Five groups of contrasts are reported outside them and are marked where they appear: the spectral-domain measurement of Section 5.10, which is graded exploratory; the ensemble contrast on measured records later in this section, which moves an endpoint without crossing a threshold; the sparse-stratum figure in Section 5.6, which is a re-aggregation of a frozen deployment corpus rather than a pre-registered contrast; and the third-party-archive arc of Section 5.7, which carries no baseline arm at all and is reported as attribution rather than as an accuracy claim; and the two batches of Section 5.8, which carry no baseline arm either and report a *cost* on our own corpus and a necessary condition for a future default, neither of which is a gain. Each row is one batch, and the number is read out of that batch's frozen verdict file rather than transcribed by hand. For all but one, the decision rule, the comparison, and the reading were fixed in a preregistration before the runs produced a single result row, and the analysis code was frozen by checksum. The exception is the B-1 row: its gate and analysis scripts were written after the results existed, transcribing rules that had already been recorded in the batch's design note. We state this rather than let the word "pre-registered" cover it. Table 6 is what the representation earns on synthetic corpora, where ground truth exists; Table 8 is where it stops, on the 12 measured records. Fig. 6 shows one reconstruction in full, as an illustration rather than as evidence.

The same numbers in metres. Every quantity above is a ratio. Table 7 restates in metres, by sea state and with interquartile ranges, the arms of the non-linear replication (B-12) and of the three ablations that carry the paper's claims — wavenumber continuity in both strata (B-16, B-19) and the learned prior (B-22). It is a unit conversion and not a new measurement — the synthetic harness normalises by significant wave height, so metres follow by multiplication — but it is the form in which a reader can ask whether the residual is small compared

Table 6: What the representation earns. All contrasts are paired per episode and one-sided in the pre-registered direction; "better" counts episodes on which the first arm has lower nRMSE, and the relative median is the median of the paired relative differences. Crowded stratum unless noted. *Read the third column with the fourth*: a large margin against a comparator that itself has little skill is not the same measurement as a large margin against one that does, which is why the "cmp." column is printed rather than described: it counts the episodes on which the *comparator* beats a zero predictor, i.e. how much skill the thing we beat had. A dash means the batch did not carry that control; where the value exists it is printed, and the two representation rows carry theirs with a qualification given below. A dash in the p column means the batch's decision rule is not a single sign test on this contrast (B-26 reads a 2×2 design, T-4 a lead ladder, and the sparse S-ENS row is undecided). These rows are separate *contrasts*, not separate corpora — 5 of them re-score the same 48 episodes under different arms (note (i)) — and their magnitudes have no defined meaning when added or subtracted.

Question	Batch	n	better	rel. median	p	cmp.
Against the strongest in-house baseline we possess						
Strongest eligible baseline	B-1	64	62	-38.6%	1.13×10^{-16}	(64/64)
Non-linear ref., 8/12 new seeds	B-12	48	43	-40.2%	6.84×10^{-9}	47/48
Unweighted sensor returns	B-15	20	17	-42.6%	1.29×10^{-3}	20/20
Sea state matched to records	B-26	24	24	-42.4%	—	23/24
Ablations of the representation itself						
Continuity of the wavenumber	B-16	48	46	-38.6%	4.18×10^{-12}	38/48†
— sparse stratum	B-19	16	14	-67.4%	2.09×10^{-3}	12/16
The learned prior	B-22	48	45	-36.3%	6.56×10^{-11}	32/48
Ensemble on learned path	S-ENS	64	55	-17.9%	1.77×10^{-9}	—
— sparse stratum	S-ENS	64	35	*undecided*	—	—
Where the gain sits						
In space (inside observed band)	M-10	48	45	-31.7%	6.56×10^{-11}	48/48
In time (lead $1.0\,T_p$)	T-4	48	47	-46.3%	—	34/48

†Measured by re-aggregating that batch's frozen rows against a per-episode zero field on 2026-08-27; it was not a pre-registered contrast of B-16. The sparse row's value *was* a named gate of B-19.

with the sea it sits in. Two things are visible there that a ratio hides. The crowded-stratum error of the deployed arm is roughly a seventh of the wave height at BF4 and an eighth at BF5, while its comparator sits near a fifth in both. And the sparse block's large relative margin survives the conversion — it is not an artefact of dividing by a small number — but its absolute errors are also the smallest in the table, so the margin is measured where there is least to get wrong. That is a different fact from the one in Section 5.6, which reports that the sparse stratum does not separate against a *different* comparator, the deployed analytic package; the two are not in conflict and neither generalises to the other.

What each n is made of, and why it is not n independent trials. The episode counts in Table 6 are not independent draws, and we state what they are. The B-1 corpus of 64 crowded episodes is a full factorial: 16 generator seeds crossed with two Beaufort levels and two component counts. The 48-episode corpus used by the ablations and by the non-linear replication is the same design with 12 seeds. So four episodes share each seed, and the true number of independent scene draws behind an n of 48 is 12, not 48.

A second axis is folded away before the sign test sees it. Each episode is run at 3 estimator seeds and the value entering a comparison is the median over them, so estimator-side randomness is suppressed rather than counted; the S-ENS rows are the exception and use 1, which that batch discloses. This makes the comparisons more stable but it does not add independent trials.

The sign tests we report treat episodes as exchangeable. That is the convention the preregistrations fixed, and we keep it rather than change the rule after the fact, but it means the p-values should be read as descriptive of the paired pattern rather than as calibrated tail probabilities: if the seed is the dominant source of scene-to-scene variation, the effective sample size lies somewhere between 12 and 48, and every p we print is correspondingly optimistic. No result in this paper turns on a marginal p — the confirmatory rows clear their thresholds by several episodes — but a reader comparing two of them on the strength

Table 7: Absolute accuracy, in the units the measurement is made in and in metres. The synthetic harness normalises by significant wave height, so metres follow from RMSE = nRMSE $\times$ H_s with no new measurement; this table is a re-aggregation of the same frozen rows that produce Table 6. Each cell is the median over episodes of the per-episode median over estimator seeds, with the interquartile range. *Read within a sea state, not across:* H_s differs between the two, so the ordering in metres and the ordering in nRMSE need not agree across rows. B-12, B-16 and B-22 score their arms on the same 48-episode corpus, so the shipped arm is one cell, not three; it is listed once, under B-12, and the generator cross-checks all three aggregations and fails if any disagree. *These are per-arm medians.* Dividing one row by another does not reproduce the relative margins in Table 6, which are medians of *per-episode paired* relative differences; the two estimators answer different questions and neither is derivable from the other.

Arm	sea state	H_s [m]	n	nRMSE	RMSE [m]
B-12 non-linear ref. (crowded)					
`SHIP-NOW`	BF4	1.2	24	0.137 [0.096,0.203]	0.164 [0.115,0.244]
`SHIP-NOW`	BF5	2.0	24	0.130 [0.096,0.158]	0.259 [0.191,0.315]
`SPEC25`	BF4	1.2	24	0.209 [0.201,0.218]	0.251 [0.241,0.261]
`SPEC25`	BF5	2.0	24	0.199 [0.191,0.213]	0.399 [0.381,0.425]
B-16 k ablation (crowded)					
`KGRID1`	BF4	1.2	24	0.228 [0.202,0.244]	0.273 [0.243,0.292]
`KGRID1`	BF5	2.0	24	0.204 [0.176,0.228]	0.408 [0.353,0.457]
`KGRID2`	BF4	1.2	24	0.302 [0.278,0.316]	0.363 [0.334,0.379]
`KGRID2`	BF5	2.0	24	0.278 [0.247,0.318]	0.556 [0.494,0.635]
B-19 k ablation (sparse)					
`KGRID1`	BF4	1.2	8	0.216 [0.186,0.275]	0.259 [0.223,0.331]
`KGRID1`	BF5	2.0	8	0.221 [0.193,0.254]	0.441 [0.387,0.507]
`KGRID2`	BF4	1.2	8	0.340 [0.271,0.360]	0.408 [0.325,0.432]
`KGRID2`	BF5	2.0	8	0.297 [0.270,0.332]	0.593 [0.539,0.663]
`SHIP-NOW`	BF4	1.2	8	0.053 [0.022,0.070]	0.063 [0.026,0.084]
`SHIP-NOW`	BF5	2.0	8	0.083 [0.039,0.204]	0.166 [0.078,0.408]
B-22 prior ablation (crowded)					
`ANA-SHIP`	BF4	1.2	24	0.220 [0.185,0.262]	0.264 [0.221,0.315]
`ANA-SHIP`	BF5	2.0	24	0.206 [0.175,0.248]	0.412 [0.349,0.496]

of p alone would be over-reading.

We therefore also report the load-bearing rows under the most conservative convention available: fold each scene seed's episodes to their median, and sign-test on *seeds*. This floors p at 2^{-n} and it is a re-aggregation of the frozen rows rather than a pre-registered contrast, but it removes the objection entirely. B-1 gives 16/16 ($p = 1.53 \times 10^{-5}$), B-12 12/12 ($p = 2.44 \times 10^{-4}$), B-16 12/12 ($p = 2.44 \times 10^{-4}$) and B-22 11/12 ($p = 3.17 \times 10^{-3}$). Every one still clears $\alpha/2 = 0.025$, so the conclusions do not rest on treating episodes as independent. *The p column of Table 6 is the episode-level value* and should be read with this paragraph.

How the rows of Table 6 must be read. Four qualifications apply to the table as a whole and are not repeatable per row. *(i)* Every corpus in it is synthetic, and the rows are less independent of one another than a table of separate batch identifiers suggests. Six of them (B-12, B-16, B-19, B-22, M-10, T-4) draw on the higher-order (HOS) reference corpus, and 5 of those (B-12, B-16, B-22, M-10, T-4) run the *identical* 48 episodes — they are re-scorings of one corpus under different arms, not independent experiments. B-19 uses a disjoint 16-episode subset of the same directory. The remaining 4 batches (B-1, B-15, B-26, S-ENS) use a linear ground-truth field; S-ENS occupies two of the table's rows. "Higher-order" names what was *requested* of the generator, not what every episode realised: of the 48 crowded episodes, 31 carry an adequate mesh and 17 a degraded one; of the 16 sparse episodes, 11 are adequate, 2 degraded, and 3 inadequate. On the degraded cells the realised non-linearity is second order rather than third, which is one reason Section 5.2 does not compare magnitudes across corpora. Whatever the grade, the corpora are synthetic and so the gains are synthetic gains. *(ii)* The learned checkpoint was trained on scenes from the same distribution family as these corpora. Only the seed axis is out of sample, and even there the addition is modest: B-12 draws 8 of its 12 scene seeds from a range no earlier batch used. No row tests a shift of the distribution itself. *(iii)* The comparator in the first block is the strongest eligible grid baseline

we possess, which is not the same claim as a baseline strengthened for this comparison; the "cmp." column is there so the reader can judge how much skill that comparator actually had in each corpus, which is the negative control for every row that has one. A value in parentheses is a re-aggregation of the batch's frozen rows rather than a pre-registered control: the B-1 row is the only such case, and it is also the only row anywhere in the table whose gate and analysis scripts were written after its results existed; Section 5.1 says both where that number is first reported. *(iv)* The B-16 and B-19 magnitudes are not attributable by subtraction from anything else in the table: a separate batch checked that experiment for confounding and found it negligible, which is what licenses reading them as sizes rather than as directions. Blindness is not uniform across the table and we set it out row by row. The B-26, M-10, T-4 and S-ENS rows were not blind — the direction was known before the runs. The B-1 row is weaker still: its gate and analysis *code* was written after its results existed, transcribing a rule recorded earlier in the batch's design note (Section 5.1). The remaining rows were analysed with the decision rule frozen in code before any result row existed.

Two rows of Table 6 carry a caveat that the table itself makes visible, and we state it rather than let the reader find it. In the B-26 row the margin is the largest in the table, but the comparator degrades in that corner: its own margin over a zero predictor falls to -4.0% there from -16.2% in the anchor corner, and our own absolute error is *worse* in the corner with the larger margin (0.137 against 0.118). The ranking of the four corners therefore reverses between the ratio scale and the absolute scale, and no claim about which sea state suits the method best is available from this experiment; what is available is the exclusion statement that the boundary does not lie along the sea-state axis, on a linear-ground-truth corpus. One of that batch's twenty-nine gates does not pass, and we say which. It is the bookkeeping gate that forbids a scene seed from appearing in two batches: a seed this batch used was later re-used by a different batch, so the collision was created after the fact and by another experiment. Every measurement gate passes. We report the count as 28 of 29 rather than rounding

it up, because a reader who is told only the passing count cannot tell that case apart from a failed measurement gate.

Two further facts belong with this row. The baseline's localisation radius was held at the same 25 m in all four corners, a value chosen on the long-period corners; in the shortest corner the peak wavelength is 19.0 m, so the ratio of localisation radius to wavelength moves from 0.33 to 1.32 across the table. That was an undisclosed confound when the batch was run, and it was closed afterwards by intervention rather than by argument: re-deriving the radius downward, preserving the ratio, made the baseline *worse* or left it unchanged, so 25 m was already at or below its optimum. And the comparator in the two short-period corners passes a sign test but does not clear the 5% skill floor that our own baseline tuning protocol requires against a zero predictor. Both facts point the same way: the margin in those corners is partly the comparator's weakness, which is why we print the "cmp." column. The T-4 row has the same shape: the comparator falls from 47/48 at zero lead to 34/48 at the pre-registered rung, so the growth of the margin with lead time is not evidence that the method improves with lead time. The T-4 rung is at the lower end of the measured lead band, 11 of the 12 records, not at the horizon the real-data section reports.

Table 8: Where it stops. Every row is a measurement on the 12 fixed-station stereo records, scored against the per-record true zero-field reference. "beats" counts records on which the arm has lower error than that reference; the pre-registered decision threshold for a confirmatory reading was 11/12. *None of these rows is a comparison between arms* — each asks only whether the arm has any skill at all.

What was varied	Batch	beats	reading
Noise model (range- and angle-dependent)	B-17	4/12	no skill
Observation density and noise, best corner	B-18	8/12	below threshold
Noise *shape*, best of four models	B-14b	8/12	below threshold

Table 8 is the paper's central negative and the reason its title speaks of an operating boundary. Four candidate explanations for it were measured and none

accounts for it: the shape of the noise (B-14b), the density of the observations and the noise level together (B-18), a realistic range- and angle-dependent noise model (B-17), and the sea state (B-26, in Table 6). The learned prior does not reach the pre-registered decision threshold on the measured records under any arm configuration we ran, and we report that as the measurement it is rather than as a limitation to be addressed later. A second negative, on a third party's synthetic fields rather than on measured records, is reported in Section 5.7. Unlike this one it comes with an attribution attached, and the two must not be merged: they are different corpora, different observation models and different failure surfaces, and neither transfers to the other.

The range- and angle-dependent noise model was re-run on sensor geometry recovered from the data. That model needs a sensor position, and the ablation declared one; the pixel-correspondence channels in the full-resolution files let the camera pose be solved instead, and it differs. Re-running with the recovered geometry leaves the reading unchanged: the arm still does not separate from a constant-noise arm on the seven records that have recovered geometry (3/7), and the stratum split holds with a gap of 0.657 against a threshold of 0.5. Because substituting the geometry also moves the noise *level*, we ran the same arm with its mean variance matched back to the deployed level; that arm holds too, at a gap of 0.514. Two limits travel with this. Only 7 of 12 records have recovered geometry — the other five keep the declared position, and they are exactly the large-box stratum, so the test can only ask whether the near-shore records improve. And the two arms disagree on one record, so the geometry and the level are not fully separated. An earlier version of this comparison used the recovered centre with its two horizontal axes exchanged and is withdrawn; the corrected run is the one reported here, and it survives by a wider margin than the withdrawn one did.

The two S-ENS rows of Table 6 deserve a word, because they are the only rows there that do not describe the shipped system. They compare the learned initialiser drawing three atom sets and taking the median against the same initialiser drawing one, which is the shipped default (1). The crowded stratum

favours the ensemble on 55 of 64 episodes against a pre-registered threshold of 40; the sparse stratum is undecided, and the smallest win rate that design could resolve was 0.682. We report it because the same operator earns on the measured records, and whether that transfers is otherwise an open question — *not* as a recommendation to change the default.

We then asked whether the default should change, and the answer is no. A second pre-registered batch put two conditions to the ensemble: that it not harm the sparse stratum, and that it stay within the frame budget. The first was not resolved — 53/64 episodes lie within the pre-registered 2% margin against a threshold of 56, so non-inferiority is not established, although the median relative change is -8.1% in the ensemble's favour and it is better on more episodes than not. The second failed outright, and decisively: the ensemble costs 18.30 ms per tracking frame against 6.00 ms for the shipped default, because the deployed code updates every member on every frame rather than only at initialisation. Initialisation itself stays cheap (10.49 s against 2.15 s within the same batch, on a clock that starts after the prior's own inference and therefore understates both), which is why we had expected the cost to be a one-off. It is not: it is a permanent factor of three on the per-frame budget, and that is why the shipped default remains 1.

One positive does exist on the measured records and it is not a skill claim: giving the proposal an ensemble lowers its forecast error at the 1–3 s horizon (28/36, -8.5%, $p = 5.97 \times 10^{-4}$), and the same operator gives 35/36 (-11.1%) on the far band; this is a within-arm contrast, and the endpoint against a zero predictor remains undetected. Four things belong with that number. The unit is not the record: 36 counts record–lead cells, 12 records at three lead bands, and the record-level statement is weaker. The analysis was not blind, and one of the two bands was partly determined by an answer we had already seen. The smallest win rate the design could resolve was 0.742. And the 12 records come from four fixed stations, so nothing here generalises to the site level.

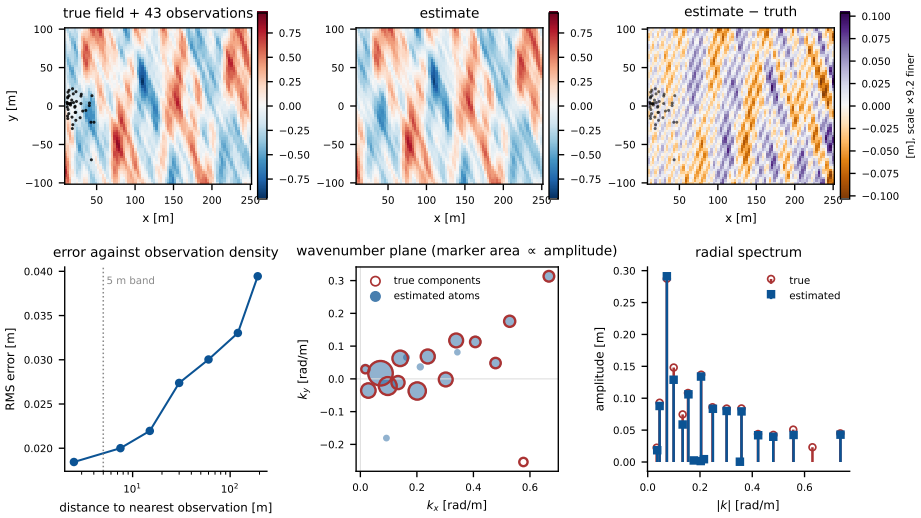


Figure 6: One crowded episode, one frame, illustrative only — *no comparison is drawn here*, and every quantitative claim in this paper lives in Table 6. Top: the true field with that frame's observations overlaid, the reconstruction, and their difference on a colour scale 9.2 times finer (the scale factor is printed on that panel's colour bar). The observations occupy a small patch near the sensor; the field is reconstructed across the whole domain from the spectral parameters, which is what "grid-free" buys and also where it can go wrong. Bottom left: RMS error against distance to the nearest observation, which roughly doubles from the observed patch to the far corner — the error is not uniform, and a reader should not read a single domain-average number as a local accuracy. The RMS error over this frame is 0.032 m, from 43 observations. Bottom centre and right: the estimated atoms against the true components. Most are recovered; the true component furthest from any estimated atom sits at $(k_x, k_y) = (0.58, -0.25)$ rad/m, and the estimated atom furthest from any true component sits at $(0.09, -0.18)$ rad/m. The provenance of this figure — episode, frame, seed, configuration, and commit — is recorded alongside it.

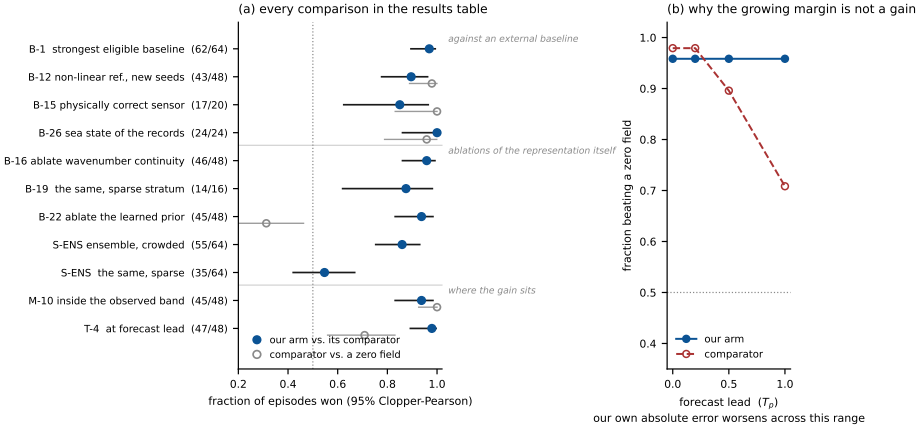


Figure 7: (a) Every comparison in Table 6, as a win fraction with an exact 95% Clopper–Pearson interval. Filled markers are our arm against the comparator that batch used; hollow markers are that comparator against a zero field, i.e. how much skill it had. Rows without a hollow marker are the ones whose batches did not include that control. The sparse S-ENS row is the one contrast here that does not separate. (b) Why the margin that grows with forecast lead is not a gain: our arm's own skill against a zero field is flat across the ladder, while the comparator's falls away, so the ratio widens because the denominator weakens. Generated from the frozen verdict files by `scripts/gen_fig_results.py`.

5.10. A spectral-domain metric, and what it took to get one

Everything above is one metric. We add one spectral-domain measurement, and the route to it is part of the result. Our first attempt was pre-registered and *failed its own negative control*: that design required a zero field to score below *both* arms on the two-dimensional wavenumber-spectrum R^2, and on a substantial minority of episodes the analytic comparator scored below a zero field instead — placing energy at the wrong wavenumbers is penalised by that metric while placing none is not. Its preregistration made that disqualifying, so it produced no label and we do not quote its contrasts. Relaxing a gate after seeing what it caught is the failure mode this protocol exists to prevent.

We therefore re-ran the measurement on a *different* corpus — disjoint seeds and a linear rather than a higher-order reference — with the control split into three: does the metric behave, does *our* arm beat a zero field, and how often does the comparator. The first two block; the third is reported. On 32 crowded episodes the deployed learned initialisation matches the reference wavenumber spectrum better than the analytic one on 25 ($p = 1.05 \times 10^{-3}$). *We grade this exploratory and not confirmatory*, because the first attempt's numbers were known when the second was designed.

Three things travel with it. The comparator beats a zero field on only 21 of the 32 episodes, so this margin is partly the comparator's weakness and its size should not be read as an accuracy ratio. Our own arm is below a zero field on 2 episodes. And the metric compares power spectra, which for a real field are symmetric under $\mathbf{k} \to -\mathbf{k}$: it does not distinguish propagation direction, so it is a spectral-magnitude agreement measure and not a directional one. The companion amplitude-recovery contrast did not reach its threshold (20/32) and we draw no conclusion from it.

What was removed, and what that costs. The three subsections that previously stood here — an ablation of the dispersion constraint and the confidence weighting, a raydrop-model sensitivity study, and a sparsity/noise/sea-state robustness study — together with six tables and five figures, have been moved to the sup-

plementary archive rather than deleted. Their corpus is the one whose headline comparison is retracted, and two of them were additionally produced before a correction to the tracker's phase advance. Where a pre-registered replacement exists it appears in the two tables above. Where none exists, the quantity is simply absent from this paper and we do not restate it from the archived run: this applies to the five-metric evaluation panel, the stratification against wave buoys, the twelve-episode comparison against tuned grid baselines, and three sensitivity sweeps — observation density, additive noise, and the residual growth threshold τ_R — whose questions remain open rather than answered. Two items that stood in this list in the previous version have since been re-measured and have moved out of it: a spectral-domain contrast (Section 5.10, on a disjoint corpus and graded exploratory) and the per-frame latency of the deployed learned path (Section 3.5). The paper is thinner for this, and a reader comparing it against the earlier version will find fewer numbers rather than more. That is the intended direction: every number that remains is one a frozen verdict file will reproduce.

6. Discussion

6.1. Why a grid-free representation, and where it stops helping

A grid state must resolve the field everywhere it is defined, so its cost and its conditioning are set by the resolution rather than by the complexity of the sea. A spectral state pays instead for the number of components it carries. That is the structural argument for the representation, and the ablations in Section 5.4 are what turn it from an argument into a measurement: removing only the continuity of the wavenumber removes a margin of -38.6%, and the loss grows when the grid is coarsened. The ablated comparator is not empty — it beats a zero field on 38/48 episodes — and the coarser rung does not, so that second step is a direction and not a size. We checked separately that this ablation is not confounded with the amplitude-and-phase refit it necessarily performs, and the

magnitudes here are *not additive* with the baseline margin: they were measured on different corpora against different comparison arms.

Where it stops helping, stated as measured. The advantage is not uniform across regimes, and we no longer characterise its regime dependence: the earlier characterisation was computed on a corpus in which the compared arms were never scored on the same frames, and we withdraw it rather than restate it. What we can say from the present corpora is narrower and is already in Section 5.6: the margin is measured on the crowded stratum; against the deployed analytic package the sparse stratum does not separate; and on measured records the representation does not reach the decision threshold at all.

6.2. Effect of observation model

Two questions about the observation model have been measured on frozen batches rather than argued. First, whether the geometric weighting of returns changes the conclusion: it does not, and the unweighted model is in fact the more favourable of the two (B-15, Table 6), with the comparator retaining skill in both. The second model was specified as a specular channel but never reaches it at this geometry, so what was varied is the spatial weighting of returns, not the optics (Section 4). Second, whether the *shape* of the observation noise explains the negative on the measured records: it does not, and the best of four noise models still reaches only 8/12 (B-14b, Table 8). That fraction counts records on which the arm beats the per-record true zero-field reference; it is not a comparison between arms, and asks only whether the arm has any skill at all. The earlier cross-arm sensitivity figures are withdrawn with the corpus they came from and are in the supplementary archive.

6.3. Hyperparameter sensitivity

The four hyperparameters of the analytic path (lr=0.01, λ_1=10^{-4}, τ_{prune}=0.10, τ_{grow}=0.05) were selected by a single coarse sweep during development and then held fixed across every batch reported here — across Beaufort 2–5, 1–30 components, several ground-truth classes, and both strata. That one configuration

was never re-tuned per experiment is a property of the protocol and can be checked in the preregistrations; it is the only sensitivity statement we make. The development-time perturbation sweep that the earlier version of this section reported is not restated: it was run on the retracted corpus and, for λ_1, at values that predate the change of the shipped default to 10^{-4}. It is in the supplementary archive.

6.4. Practical deployment considerations

WaveSplat's computational footprint on a single CPU thread (measured in Section 3.5; an earlier figure quoted here was withdrawn; Appendix A, R3) is intended for deployment on standard shipboard computing hardware. Inference does not require GPU acceleration for the tracking phase, and no offline calibration against a particular site is needed. It does require the learned proposal checkpoint at initialisation, which is where the GPU is used when one is available. *Which system this paragraph is about.* The costs above are those of the learned path, and on the synthetic corpora that is what the shipped configuration runs. On input that carries no ground-truth field — which is the case for real sensor data — the shipped router hands off to a different estimator (Section 3), so the paragraph above describes the cost of the system this paper measures, not of a system we have run end to end on a vessel. Making the learned path the one that runs on real input is exactly the boundary Section 5.6 reports we have not crossed, and we do not present the timing as evidence that it has been.

The spectral parameters are directly interpretable: a naval architect can inspect the estimated wavenumber vector, amplitude, and frequency of each component, enabling sanity checking against visual observation and meteorological forecasts.

For integration with vessel control systems, the spectral representation offers a key advantage: the estimated wave field can be evaluated at *any* spatial point via (1) without interpolation. This enables downstream applications such as wave-preview feedforward control [5], where the wave field must be evaluated at

spatial preview points ahead of the vessel. Grid-based methods would require interpolation between grid points, introducing additional error and latency.

6.5. Temporal extrapolation as validation of spectral fidelity

Because the estimated parameters satisfy the dispersion relation by construction, the forward model (1) can be evaluated at any future time without re-estimation. Whether that extrapolation is accurate is therefore a test of the estimated (k_x, k_y, ω, ϕ) rather than a forecasting contribution, and it is reported in Section 5.5 as the T-4 row of Table 6: at a lead of $1.0\,T_p$ the deployed path is ahead on 47 of 48 episodes. That row must be read with its negative control, because the comparator's own skill falls from 47/48 at zero lead to 34/48 at that rung; the rung sits at the lower end of the measured lead band, 11 of the 12 records. The earlier five-episode horizon table, produced before the tracker phase-advance correction, is in the supplementary archive.

6.6. Limitations and future work

Several limitations should be acknowledged.

Online model order does not contribute accuracy. The pruning-and-growth mechanism of the retracted corpus (archived) does select scene-matched component counts, but under the corrected tracker its accuracy contribution was null on the twelve episodes it was measured on, against a seed-to-seed noise floor far larger than the effect, and it was actively harmful on most of the crowded ones, where the fixed energy criterion prunes to fewer components than the scene contains. We accordingly present it as a mechanism and a compute-efficiency device rather than as a contribution. A model-order criterion that is aware of crowding—for instance, energy retention conditioned on the beamforming main-lobe width rather than a fixed 90% quantile—is the natural repair and is untested.

Directional spread of the synthetic distribution. Compared against a large buoy archive, our generator occupies the lower tail of the observed directional-spread distribution and its peak-period ceiling excludes swell, so the synthetic universe is narrower and shorter-period than the measured one. The per-percentile figures are not restated here: they come from the retracted corpus and have not been re-measured. The repair belongs to the generator, not the estimator—directional spreading functions and a T_p range extending into swell—and we deliberately did not change it mid-study so that the synthetic results remain from one frozen dataset. We do not characterise which regime the advantage is largest in; that characterisation was withdrawn in Section 6.1.

The positive results are synthetic. Every margin reported in Section 5.1 and its ablations is measured on simulated fields with a simulated sensor. Measured data enters this paper through the negative in Section 5.6 and Table 8 — 12 fixed-station stereo records on which the learned prior does not reach the decision threshold — and through one within-arm positive in Section 5.9, where giving the proposal an ensemble lowers forecast error without crossing that threshold. It enters a third time in Figs. 4 and 5, which show the same 12 records with the deployed reference arm drawn beside the learned one; that arm reaches ordinary significance against a zero field and, like the learned arm, does not survive the multiplicity correction for this arc. *Synthetic is not the same as ours, and the distinction now carries a result.* Synthetic data we did not generate enters through a second negative: on a third-party ground-truth corpus the shipped arm has no skill against a zero field at its shipped scale (Section 5.7). That negative is against a zero field rather than against a grid baseline, and on a different observation geometry, so it does not withdraw the headline; what it adds is that "simulated" and "simulated by us" are not interchangeable in the positive direction either. Real LiDAR from a moving platform may contain systematic biases (multi-path, spray) that neither our noise model nor those fixed-station records represent, and no shipboard measurement of any kind supports this paper — the platform term was removed from the title for

that reason.

We did try to learn from the measured records, and what it learned was the records. A reader will ask why no prior trained on measured data is reported here. One such attempt exists, and the way it failed is informative. *Its scope has to be stated first*: it was not a retraining of the deployed diffusion prior — that experiment has never been run — but a self-supervised representation trained on the twelve stereo records themselves, read out by a linear probe on a per-record statistic (the elevation kurtosis). On frozen features the probe identified which record it was looking at with accuracy 0.790 in a twelve-way choice against a chance level of 0.083, up from 0.539 at random initialisation: a lookup path from the encoding to the record label was open. Scored leave-one-record-out, the same probe returns $R^2 = -0.603$ against -0.209 at random initialisation — worse than predicting the mean, with the correlation falling from -0.298 to -0.059 — and on a record the encoder had never seen (true value -0.234) it predicts $+3.014$ where the untrained network predicts $+0.308$, an error of 3.248 against 0.542. *What we take from this is narrow, and it is about this corpus rather than about the method*: twelve records from four stations differ in grid spacing, stereo noise texture and dead-pixel pattern, so a network handed them as a training set can lower its objective by recognising which record it is in, after which any quantity that is constant within a record is available by lookup instead of by physics. It says nothing about whether a better recipe, a different objective, or a larger measured corpus would succeed; those were not tried, and we do not claim they would fail. The network involved is separate from the shipped checkpoint, which as stated in Section 3.4.1 has seen no measured data at all.

Why this sample cannot decide the question. The experiment a referee would ask for — hold out a site, train on the rest, and show that the prior does not transfer — cannot return an interpretable answer on the data this project holds, and the obstruction is arithmetic rather than effort. The measured corpus is twelve records from four fixed stations, and that is fixed. Blocked at the site,

the unit of analysis is $n = 4$; the smallest one-sided sign-test p four units can produce is $2^{-4} = 0.0625$, so *no effect size, however large, reaches* $\alpha = 0.05$ and the design rejects nothing before it is run. This is not hypothetical: the same collapse was measured here once, when a window-level result at $p = 0.005$ was re-analysed with records as the blocking unit and landed exactly on that floor, which the preregistration had named in advance. Blocked at the record, $n = 12$, the decision threshold this paper uses on measured data is $10/12$ ($p = 0.0193$), and the effect such a design detects with 80% power is $q_{80} = 0.869$. The largest per-record effect any training-side intervention has produced in this project is $9/12 = 0.75$, which lies outside that range; detecting $q = 0.75$ at the same power would need 23 records against the 12 we hold. *Two power figures must not be mixed*: $q_{80} = 0.869$ is the single-test value, while that batch's own family-corrected threshold (Holm over three tests) is $11/12$. The honest statement is therefore that *this sample cannot decide the question*, not that we declined to ask it — and correspondingly this paper makes no claim of the form "training on measured data does not work", which the data we hold could not support either way. Enlarging the corpus is blocked for the separate, measured reason given below.

The observation model is not faithful to a real scanning LiDAR. The synthetic corpus draws its returns from a raydrop model. We measured that model against real returns from a Velodyne HDL-32E scanning a water surface (30 files, 236423 cells) under a pre-registered threshold this project had itself written down: the median relative error is 0.348, against a threshold of 0.2. Two controls decide how to read that number. The positive control shows the data carry structure the ruler can see — measured spread 0.361 against a null 95th percentile of 0.008 — so the negative is not bluntness. The negative control shows how little signal the model has: shuffling the model across cells costs almost nothing, the shuffled error's 5th percentile being 0.353 against an actual 0.348, and the rank correlation between predicted and observed return rate is 0.173. The honest reading is therefore not "slightly wrong" but "almost no signal in this regime".

The measurement is exploratory, it ran no estimator, and its regime is a surf zone rather than the deep water the synthetic corpus represents — a transfer that runs in the unfavourable direction and that we do not resolve.

We also asked whether the failure lies in the radiometric quantity or in the detection law applied to it. Holding that quantity fixed and replacing the multiplicative-gain law by the threshold-with-speckle law the same simulator already ships — one free parameter each, fitted by the same median-matching rule — lowers the error by -13.0%, from 0.348 to 0.303 — though the median-matching rule is not equidistant from the two families' own optima, leaving the first 2.06% above its best and the second 0.12%, so family-against-family the improvement is 11.3%, and the bias runs toward the conclusion of this paragraph — which is still far above the threshold, and it clears that law's own shuffled null (0.317) by only 4.6% in relative terms. A third shipped variant is excluded before the fact, because the frozen cells carry only incidence angle, depth and return rate, and a slope-dependent gate has nothing to predict from them; that variant is therefore untested here, not refuted, and the source comment we quote for it describes the simulator's own shipboard geometry, not the station geometry these cells come from. Neither measurable law is faithful, so the remedy is not to select a different one of them; the remaining suspect is the radiometric term itself, whose incidence-angle dependence the simulator's own source comments already flag as inverted relative to what the surrounding text claims. This comparison is exploratory, it was not blind — a first attempt was blocked by two mis-specified gates of ours and the statistics were seen while diagnosing that block — and it inherits the surf-zone regime.

What this does and does not undermine matters. Every ablation in Section 5.4 compares two arms *under the same observation model*, so the internal comparison — which component carries the accuracy — is untouched by an error common to both arms. What the measurement bounds is external validity: the claim that a margin measured under this observation model would appear, with this sign and this size, on returns from a real scanning sensor. We make no such claim, and this is the second independent reason (after the synthetic

reference field) why the margins in this paper are not transferable numbers.

On measured records the scoring sits largely inside the observation support. On the fixed-station records the query points are close to the observations: the gap to the nearest observation is a few hundredths of a peak wavelength. To ask what that is worth, we confined the observations to one half of each box and scored the same single estimator run on two disjoint query subsets — inside the observed half and outside it. Aperture, observation count, seed and initialisation are then identical by construction and only the scoring region differs. Skill is present inside on 12/12 records and outside on only 8/12; the median ratio to a per-record zero field moves from 0.717 to 0.979 — *close to*, though not past, the no-skill line, which is why the record count and not the ratio carries the claim. The paired direction holds on 10/12 records ($p = 1.93 \times 10^{-2}$), which clears the nominal threshold but not the confirmatory one. *It also fails to reproduce in the stratum with the most query points*: on the 5 records whose box exceeds 40 m it holds on 3, so we cannot exclude that larger apertures hold up outside their support. We report the split rather than the primary alone, we name no mechanism, and one record of twelve was seen in a smoke test before the batch was frozen.

Part of the measured error is charged for content the model class cannot represent. The reference surface against which the measured records are scored is itself a reconstruction, and an independent instrument bounds its high-frequency excess. Across the 7 records that carry a co-located wave-gauge array, that bound — expressed in units of the record's own standard deviation — predicts how much skill the deployed arm retains, with a rank correlation of 0.893 ($p = 6.15 \times 10^{-3}$, exhaustive permutation, against a minimum detectable ρ of 0.714 at this sample size). The control matters more than the correlation: the same bound is uncorrelated with the no-skill zero reference ($\rho = 0.000$, $p = 0.518$), so this is not the restatement that noisier records have larger everything. Since the excess lies above 1 Hz and the peak periods on these seven records are 3.1–4.4 s, it lies above the band the estimator's few atoms are fit-

ted in, and the scoring charges the estimator for it. *We state that as a band argument, not as a proof of unrepresentability*: the batch tests no gate on the estimator's own wavenumber reach, and the gauges themselves carry a small share of their variance above 1 Hz. This is exploratory, it was not blind, it rests on one site, its bound is an upper bound, and it does not rescue the learned prior — the same correlation on that arm is null. We therefore report it as a caveat on how the measured negatives should be read, and we do not construct a corrected error from it.

The forecast horizon on measured data ends inside two wave periods. Beyond a lead of about five seconds the frozen-fit real-data arm stops predicting rather than degrading gracefully. Measured as the ratio of predicted to true field variance, and calibrated against a positive control that must return one by construction (it returns 0.82–1.92, median ≈ 1), that arm's predicted field holds 0–17% of the true variance at leads of five seconds and beyond: it is effectively outputting zero. The measured records have a median peak period of about 3.5 s, so the skill ends at roughly 1.2 wave periods — inside the one-to-two-period horizon that shipboard operations would need. Three qualifications travel with this. It is a re-aggregation of frozen rows rather than a pre-registered contrast, and the ratio is an upper bound. It is a property of the *frozen-fit protocol*: the arm that refits every two seconds does not collapse. And the arm in question is the deployed bank estimator, not the learned prior this paper is named for — which, as Table 8 records, does not reach the threshold at any lead including zero.

Is the reference field inside the estimator's own model class?. A standing objection to any ablation on simulated data is that the reference field may be exactly representable by the model doing the estimating, in which case the comparison never leaves that model's own hypothesis space. On this project's original linear corpus that objection is exactly right, and we have long recorded it as such: reconstructing the stored field from the stored component table reproduces it to *zero* — on 12/12 episodes the maximum absolute discrepancy is not small

but identically 0. That control also tells us the ruler is exact when it should be, which is what makes the other half of the measurement readable.

The headline ablation chain, however, does not run on that corpus. It runs on higher-order episodes, and there the same reconstruction leaves a residual on every one of the 48 crowded episodes. **How large that residual is depends entirely on which norm one reads, and we give both.** At the worst grid point of the sampled frames it is 0.308–1.416 times the field's own standard deviation (median 0.603); the same reconstruction read in root-mean-square is 0.047–0.202 (median 0.079), which is 0.62% of the variance at the median and 4.08% on the worst episode. Refitting amplitudes and phases at the same wavenumbers — which at a single frame also frees the temporal frequency, so it is the best a plane-wave sum can do at those wavenumbers — lowers that root-mean-square residual to 0.058, so roughly a quarter of it is coefficient drift rather than a limit of the class.

The honest statement is therefore narrow: the reference field those ablations are scored against is *not exactly* inside the estimator's model class, whereas on the linear corpus it is exactly inside; but the departure is small in energy, the free-wave part dominates the field, and allowing the wavenumbers to move as well could only shrink the residual further. Three limits travel with that: it measures a distance and not a sufficiency, so it does not establish that the departure is large enough to matter; the higher-order realisation is graded per episode and the grades are mixed; and it says nothing about measured data, where no component table exists.

Someone else's ground truth carries the phase coupling, once we gave the test enough frames to see it. The residual objection to everything above is that the reference fields are made by our own generator. That cannot be settled with our code, so we took a published third-party synthetic corpus (40) — 12.8 GB, CC-BY-4.0, 126 independent simulations of 502 frames each — and asked one question of it: does its surface carry phase coupling, or is it indistinguishable from a random-phase linear superposition? The test is the classical surrogate-

data pairing: pooled skewness against 32 phase-randomised surrogates of the same field, which preserve the amplitude spectrum exactly. On 12 blocks the answer is 2/12 — *not detected*. The ruler is not blunt: run unchanged on our own higher-order corpus it fires 8/8, and on our own linear corpus 0/8.

Two things must be said with that number, and they point in opposite directions from the obvious reading. First, their fields are *not flatter in kind*: the median skewness we measure on them, +0.0507, is 77% of what we measure on our own higher-order corpus — lower, but of the same order, not the order-of-magnitude gap the detection counts would suggest. What differs is the width of the null — theirs is 3.0 times wider — so the same signal sits below threshold. The detection rates of the two corpora therefore may not be compared, and we do not claim their solver is more linear than ours. Second, their archive ships no documentation naming the solver, so we do not call the corpus higher-order or fully non-linear. The block size was fixed before the archive was opened at 24 of the 502 frames available.

That last constraint was ours, not the data's, so we froze a second pre-registration and repeated the test at the full 502 frames on 12 further simulations, disjoint from the first set. The answer reverses: 11/12, $p = 4.9 \times 10^{-13}$ against the pre-registered per-block false-positive rate of 0.061 (a nearest-rank 95th percentile over 32 surrogates, not 0.05). That p assumes the blocks are independent and they are not: each draws its surrogate phases from the same seed, so the twelve share a null and the binomial is anti-conservative. Bounding the other extreme — a threshold shared completely across blocks — gives $p \leq 1.8 \times 10^{-8}$, and we do not quote the face value without this sentence beside it. Two of those 12 blocks were not blind and we say so: one had its checksum and standard deviation read during the first batch while we were verifying that the simulations are distinct, and one was run as a single-block cost check before the full run, so its outcome was seen. The block-selection rule was fixed before either exposure and we did not change it afterwards, since changing it is the selection effect we would be trying to avoid. The exposed block is also the *only* one of the 12 that fails. Within this arm exposure and sea state are wholly

confounded for that block — it is the only one of either kind — so we cannot say which of the two it failed for. (An earlier draft argued the sea state was the cause because two unexposed blocks at the same sea state also fail; that argument is withdrawn, because those two blocks were themselves exposed, in the first batch, and more fully.) Running the same enlarged test on the *original* blocks — same files, same ruler, only the frame count changed — moves them from 2/12 to 9/12, which identifies the first result as a statement about our power rather than about their fields. That arm shares its data with the first batch, so it is a check on the mechanism and we do not use it to revise the first batch's verdict; and because the two corpora are now tested at different frame counts, their detection rates remain not comparable. We report both because they are a ladder and not a contradiction, and because the first was frozen and published before the second was designed. One further pattern, which we did not pre-register and therefore mark exploratory, makes the reading coherent: pooled skewness rises monotonically with the significant wave height labelling each simulation, from +0.011 at the mildest to +0.136 at the steepest, with rank correlation 0.99 over 24 blocks, and every block that fails to clear its surrogate null sits at the two mildest sea states. A dose–response of that shape is what physical non-linearity would produce.

So the objection is answered in one direction and not the other: a reference field built by someone else, from radar-imaging work with no connection to ours, carries the phase coupling that a random-phase linear superposition cannot. This test reads their ground truth; it does not score our estimator against it. That comparison has since been run on the same archive and is reported in Section 5.7: the deployed arm does not reach its decision threshold there either, and what that section adds to the present one is an attribution for the failure rather than a further test of their fields.

The measured corpus is small because the candidate we checked is out of regime. The twelve records come from four fixed stations, and the obvious way to enlarge that set — another public stereo reconstruction — did not survive an entry check

that this paper's own hard constraint imposes. For each record we measured the fraction of wavenumber-ring energy lying within three frequency bins of the linear dispersion surface, and compared it against a null that applies the identical counting geometry to a *displaced* surface, so that each record is judged against itself. All 12/12 of our records exceed their own null. Of the records from a shipborne Antarctic stereo campaign, 0/6 do: their observed fractions reach at most 0.011, below the weakest of ours (0.071). *We do not quote a ratio between those two numbers.* A later re-aggregation on frozen data (zero estimator runs) established that the two groups were scored over windows of very different length — theirs about five times longer, because window length is set by the sampling interval through a fixed transform size — and that matching the window makes the two ranges overlap. The non-exceedance below is unaffected: it is measured against each record's own null, which rescales with the window. **This is a non-exceedance, not an absence.** On the same records the observed fraction sits above the *median* of its own null on 6 of 6, so what we can say is that the concentration does not clear the null's 95th percentile — not that no dispersion structure is present. One confound is disclosed rather than resolved: the Antarctic records all have a 0.5 s sample interval against 0.067–0.1 s for ours, and the null's counting geometry self-overlaps more often at the coarser interval, which raises that group's threshold. The artefact pushes in the direction of the reported outcome, so we measured it rather than argue about it: recomputing every threshold with each frequency bin counted once — the observed values are bit-identical under that change — moves the Antarctic thresholds by -0.6% at the median, and the counts do not move at all (12/12 and 0/6). For a record to change side its threshold would have to fall by more than three quarters. The sampling-interval confound is real in direction and too small in size to carry the result; the other channels through which it could act are not measured here. We do not claim those data are poor, and we do not name a mechanism — uncompensated platform motion and swell longer than the reconstructed patch are not separable from the surface field alone. We report only that a hard dispersion constraint is not a description of that

sea, so adding it would not enlarge the corpus this estimator addresses. The simulator and estimator carry an automated test suite (291 tests, counted by a collection run rather than typed) covering dispersion, Gerstner kinematics, Fresnel optics and raydrop statistics; *it does not certify that the generated data is non-linear*, because the Gerstner test exercises a kinematics function the generation pipeline does not use for horizontal displacement. What the protocol does provide instead is narrower and checkable: each comparison in Section 5 is paired per episode, its direction and decision threshold fixed before results existed, its analysis code checksum-frozen (with the one exception noted there), and its number read from the resulting verdict file rather than transcribed. Like the LiDAR-based studies that preceded us [13, 3], we establish the algorithm in simulation first; unlike a tank trial, simulation cannot tell us whether the result transfers, which is what Table 8 is for.

Linear forward model. On the *linear* corpus the synthetic ground truth is a displacement-free linear superposition on a fixed grid, so it lies in the same function space as the estimator's model equation and the measured mismatch is *zero*; on the higher-order corpus that carries the headline ablations it is *not* exactly inside that class, though the departure is small in energy (Section 5.6). A zero mismatch is not neutral between methods, because the grid-based baselines do not use that representation. (An earlier claim that the mismatch was small but non-zero, and equal across methods, is withdrawn: Appendix A, R2.) The linear approximation does degrade for steep waves. We had written that a second-order Stokes extension would preserve the spectral parameterisation and close the gap; a later batch measured that suggestion rather than repeating it, and it does not survive. Adding the finite-depth Sharma–Dean second-order correction with *no free parameter* lowers the residual on 37 of 48 crowded episodes, but by only 3% of it. Those two figures use different frame sets and we state which: the count includes the t=0 frame, where the reference is initialised as a linear surface and therefore carries no bound harmonics, so any correction can only hurt; excluding that frame the count is 41 of 48 and the magnitude is 3%.

The label is unchanged either way. and the failure is not one of scale, because the correction is not small (its norm is 0.58 of the residual) and is largely misaligned with it (median cosine -0.35), so even at its own optimal scale it removes only 12% of the residual variance. The second-order term is therefore a real but minor part of the departure, and pointing future work at it is not warranted by our own measurement. *Non-linear validation was performed in a separate higher-order-spectral (M=3) batch, not on this corpus.*

Tracking phase dependence on initialization. The `w_phi` tracking mode freezes wavenumbers and updates only amplitudes and phases, so whatever the initializer misses is unrecoverable thereafter: tracking quality is capped by initialization quality, regardless of why a component was missed. Measured on the re-scored corpora, tracking ends slightly above its own initialization on most arm–episode pairs, by a small and bounded margin. So the honest characterisation of Phase 2 is not that it degrades the estimate but that it holds the initialization roughly in place at a fraction of the per-frame cost. *Tracking is a compute mechanism, not an accuracy mechanism.* Two earlier descriptions of this limitation — a beamforming detection threshold at $|k| \gtrsim 0.4$ rad/m, and a 2–3× inflation of tracking error — were withdrawn; both were properties of the superseded rendering mesh rather than of the algorithm (Appendix A, R6).

Residual amplitude under-estimation. The estimator recovers less variance than the true field, and on the retracted corpus that deficit did not differ between the sparse and crowded halves even though nRMSE did. The levels are not restated here: variance ratio was part of the secondary panel that was not re-measured for the batches reported in Section 5. An earlier attribution of the deficit to Adam momentum is withdrawn (Appendix A, R7); what remains is *unattributed* — we can observe it but not currently explain it, and we prefer to say so rather than carry forward a mechanism whose named cause no longer exists. Post-hoc least-squares amplitude calibration is effective when dense observations are available but does not improve with sparse LiDAR (∼50 pts/frame) due to insufficient spatial coverage; isolating the residual mechanism (momentum-free optimizers

for amplitude, periodic optimizer state resets, or a per-frame amplitude least-squares solve) is future work.

Initialization resolution and the peak-separation radius. The greedy beamforming peak search enforces a fixed minimum separation $\Delta k_{\min} = 0.15$ rad/m between accepted peaks, so component pairs closer than this in wavenumber space are structurally unresolvable by our initializer regardless of signal-to-noise ratio. This is not a corner case: a majority of the simulated episodes—and every 15-, 20- and 30-component episode—contain at least one true pair separated by less than 0.15 rad/m. (The exact count came from the retracted corpus and is not restated.) A pre-registered sweep of $\Delta k_{\min}$ shows the constant to be a regime-dependent trade rather than a universal floor — relaxing it helps the crowded case and hurts the sparse one, in every seed of each — so two things follow. The crowded-regime error is *not* explained away by this constant: the bulk of it survives when the constant is removed. And statements of the form "these components are not recovered" are properties of the estimator *as configured*, not method-independent impossibility. The sweep's magnitudes are not restated (retracted corpus, not re-measured) and the sweep design is in Appendix A, R8; the principled repair is an adaptive radius scaled to the beamforming main-lobe width, which we have not tested.

Current estimation. We do not estimate ocean currents, whose Doppler shift makes the apparent dispersion $\omega = \sqrt{g|k| \tanh(|k|d)} + \mathbf{k} \cdot \mathbf{U}$; a 0.5 m/s current introduces $\sim$5% frequency bias at BF4. Joint current–wave estimation is a natural extension.

Cold start and re-initialization. Phase 1 requires $T_{\text{init}} = 2T_p$ of observations (e.g., $\sim$16 s at BF4) before tracking begins; during this interval no wave estimate is available. If the sea state changes abruptly (e.g., vessel course change exposing a new swell system), re-initialization is needed, incurring the same latency. A background re-initialization scheme running in parallel with tracking could mitigate this in practice.

Surface normal approximation for real data. In simulation we use the exact surface normal of the reference field for confidence weighting (that field is a displacement-free linear superposition, not a Gerstner surface; see Sections 3.2 and 4) c_j, but real-data application must substitute the flat-surface approximation $\mathbf{n} \approx \hat{\mathbf{z}}$. The resulting bias scales with wave slope (up to $\sim$9% in $\cos\theta_j$ at grazing incidence at BF4); wave-tank validation is planned to characterise the end-to-end nRMSE impact.

Observation weight nomenclature. The weighting $c_j = \cos\theta_j/(r_j/d_{\mathrm{ref}})$ is a geometry-aware simplification, not the exact Fresnel reflectance [41], which would require surface-roughness and polarisation assumptions we cannot justify from observation alone. The name follows the functional form.

Baseline fairness. We cannot claim to have beaten a fully tuned ensemble filter. The sweep and cross-baseline comparisons that once supported such a claim were run on the retracted corpus, and the one pre-registered attempt to re-establish it against a repaired baseline returned an undecided primary. What survives is the narrower statement of Section 5.1: the comparator there is the strongest eligible baseline we possess, not a baseline strengthened for the occasion. Further tuning of ensemble filters, or hybrid ensemble–spectral approaches, remain unexplored.

Uncertainty quantification. WaveSplat returns point estimates; Hessian-based confidence intervals or multi-start ensembles could provide uncertainty.

Directional spreading. Each component is monochromatic; representing continuous directional distributions (e.g., $\cos^{2s}$) would require directional or von Mises basis functions.

Ship motion. The current simulation assumes a stationary sensor platform. In practice, heave, pitch, and roll of the vessel change the LiDAR beam pattern frame-to-frame; an IMU/INS-based coordinate transform is a necessary preprocessing step for sea-going deployment, and the residual motion-compensation error constitutes an additional noise source not modelled here.

Near-surface false returns. At 1550 nm the absorption length of sea water is approximately 1 mm [42], so essentially no light penetrates below the surface; sub-surface volume scattering is negligible. However, sea spray, whitecaps, and rain droplets above the nominal water surface can generate false LiDAR returns that are indistinguishable from surface elevation measurements. These super-surface returns introduce a positive elevation bias not captured by the additive noise model, and their prevalence increases with sea state; empirical calibration on real data is needed to assess their impact.

Relationship to physics-informed learning. The division of labour here is worth stating plainly, because the two halves are often conflated. The *basis* is hand-designed: plane waves that satisfy dispersion by construction rather than as a soft penalty, carrying $4N$ parameters rather than a network's — which matters with $\sim$50 observations per frame. What is *learned* is not the basis but the *selection*: which atoms to place, as a set, from one observation window. WaveSplat is therefore physics-constrained optimisation, structurally analogous to PINNs with a neural basis, while WavePrior supplies the initialisation that neural bases lack. The ablation of Section 5.4 separates the two: with the basis intact and the learned selection replaced by an analytic one *and nothing else changed*, the arm clears a zero predictor on only 15/48 episodes.

7. Conclusion

We estimate phase-resolved ocean wave fields from sparse 3D point clouds as a small set of continuous-wavenumber spectral atoms under a dispersion constraint, with the initial configuration proposed by a learned set-valued prior. On crowded multi-component *synthetic* seas with a higher-order reference field (17 of 48 episodes realise it at second rather than third order) and previously unused seeds, this lowers median normalised RMSE by -40.2% against the strongest eligible grid baseline we possess (43/48 episodes), in a comparison where that baseline itself retains skill against a zero predictor (47/48).

What we regard as the substantive contribution is not the margin but the *attribution*. Holding the deployed pipeline fixed and removing one property at a time, the learned prior accounts for -36.3% (45/48) — measured against an analytic package that itself clears a zero predictor, though thinly (32/48, $p = 1.47 \times 10^{-2}$) — and the continuity of the wavenumber accounts for -38.6% (46/48, dose-responsive, and reproducing in the sparse stratum at 14/16). The gain also survives re-scoring inside the observation-density band our measured records occupy (45/48) and at a forecast rung that 11 of those 12 records cover (47/48) — though in the latter case the comparator degrades across the same interval, so the growing ratio must not be read as a growing advantage. Neither re-scoring was blind — the expected direction was known before the runs, so they are not blind replications — and that rung sits at the lower end of the measured lead band rather than spanning it. The two ablation magnitudes are *not additive* with each other or with the baseline margin — different comparison arms, and in the baseline's case a different corpus as well — and we verified separately that the grid-snapping ablation is not confounded with the refit it necessarily performs.

What we did not obtain. On 12 fixed-station stereo records the learned prior does not reach the pre-registered threshold against a per-record zero-field reference under any arm configuration we tested, including one in which it is given the same median-of-k field ensemble that the deployed real-data path uses — a path in which, in the shipped configuration, the prior is not invoked at all (Section 3). That treatment does lower error by a confirmed margin and does move the endpoint, but not across the threshold. We state this as a measured boundary rather than as an omission: the representation that earns its gain on crowded synthetic seas has not been shown to earn it on the measured data we hold, nor on a third party's synthetic fields at the shipped scale, and locating that boundary — rather than widening the margin — is where we believe the remaining work lies.

A second boundary, this one with a mechanism attached. Running the same deployed arm on a third party's synthetic fields gives a second negative, and unlike the first it comes with an attribution. On that archive the arm does not reach its decision threshold; an oracle handed the true wavenumbers does reach it from the identical observations, so the information is present; and a dispersion-preserving relabelling of the coordinates — a thought experiment about units, not a deployable configuration — restores the result. What that locates is the absolute-scale design range of the deployed estimator, rather than the wavelength band of the prior or the content of the returns, and a follow-up narrows it to the absolute scale of a single subsystem without reducing it to a single constant. Repairing the one concrete implementation defect we identified does not move the outcome detectably. Two further batches extend that arc, and *their counts belong in Section 5.8 rather than here.* Moving that same absolute scale on our own corpus is measured to *cost* rather than to buy in the crowded stratum, at every factor swept, though not monotonically in the factor. We read that as the constant being calibrated to the distribution the prior was trained on — which is also the corpus that batch runs on, so the two are not separable — and we mark it as a reading rather than a further measurement. And choosing the scale from the observations automatically is now available in a form that clears an equivariance gate of the kind that stopped the earlier attempt. Two things that second result does *not* say. The rule it replaces also beats the zero predictor on the same blocks, so the skill is *not* attributable to the repair; and no difference between the two rules' landing points is detected, with the quantity driving that contrast smaller than the ruler the batch measures it against, so what was fixed is a well-posedness property rather than a measured gain. Neither batch is a deployment recommendation, neither has been applied to the measured records, and the fourth batch of the arc still prints no label. None of this compares us with anyone else — there is no external baseline arm in any of those measurements (Sections 5.7 and 5.8).

We also note two limits of the evidence itself. Every comparison against a grid baseline in this paper is on the crowded stratum. In the sparse stratum

the evidence is split rather than absent: the wavenumber-continuity ablation reproduces there (14/16 episodes), while against the deployed analytic package the stratum does not separate. Those are two different comparators and neither answers for the other. And the learned checkpoint was trained on the same distribution family as the synthetic evaluation, so "out of sample" on that corpus means on the seed axis only.

CRediT authorship contribution statement

The sole author is responsible for all aspects of this work.

Declaration of competing interest

The author declares no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Appendix A. Changes from earlier versions

Earlier versions of this manuscript made claims that later measurement withdrew, and one evaluation corpus was withdrawn outright. They are listed here rather than in the running text, so that the body states only what is currently supported; each is referenced from the section where the claim used to appear. The list is the table below; we do not restate its length in prose, because that count has gone stale here before.

Data availability

Code, simulation data, experiment scripts, *and the trained prior checkpoint* will be deposited on a public repository upon acceptance. Every result in Section 5 carries a batch identifier (B-1, B-12, ...); each names a directory in that repository holding its preregistration, its checksum-frozen analysis code, its raw result rows, and the verdict file from which this paper's numbers are read.

Table A.9: Withdrawals and corrections, with what replaced them.

	Withdrawn	Why, and what stands now
R1	Geometry-aware confidence weighting as a *contribution* (2026-08-14)	A fresh out-of-sample corpus found disabling the weighting better in both strata. The mechanism is still deployed and still described, because a later ablation found that *removing* the ground-truth-derived weighting also hurts; what does not stand is calling it a contribution of this work.
R2	"The ground truth is Gerstner (non-linear), so the $O(\epsilon^2)$ mismatch affects all methods equally" (2026-08-14)	False on both halves. The generator discards the horizontal displacement, so the reference field is a displacement-free linear superposition and the measured mismatch against the model equation is exactly zero. The non-linear case is now measured separately with a higher-order reference (Section 5.2).
R3	All absolute per-frame latencies (2026-08-14)	They came from separate processes without thread pinning, so they measured the harness as much as the estimator. *Superseded*: the deployed path has since been timed in one process on a single thread and is reported in Section 3.5. No baseline arm was timed, so no comparative timing claim replaces the withdrawn ones.
R4	"The dispersion constraint contributes accuracy" (2026-08-14)	The ablation that supported it removed the frequency initialisation together with the constraint, so it did not isolate either. What stands is the parameter-count reduction, which is structural. A controlled intervention has not been run.
R5	The *corpus* itself: every cross-arm number computed on the 100-episode evaluation dataset (2026-08-14)	This is not a withdrawal of a claim but of a dataset. That corpus was found to score the compared arms on *different frames*, so no cross-arm comparison on it means what it appears to mean. Section 5.9 states which quantities had a pre-registered replacement and which are simply absent as a result; the withdrawn sections, tables and figures are kept verbatim in the supplementary archive named in the Data availabil-

Two figures are exceptions and are marked where they appear: the sparse re-aggregation of Section 5.6, which is recomputed from W-15's frozen rows rather than read from its verdict, and the illustrative frame of Fig. 6, which carries its own provenance record instead. The "supplementary archive" referred to in Sections 5.9 and 6 is a single directory in that repository holding the subsections, tables, and figures withdrawn from this manuscript, kept verbatim with the reason for each withdrawal, so that a reader can see what was removed rather than only that something was. The complete 100-episode dataset can be regenerated from the released simulator with the provided configuration files and fixed random seeds, ensuring end-to-end reproducibility of the tables and figures that were computed on it. The headline results of this paper were *not* computed on that dataset: they come from the frozen corpora of the batches identified in Table 6. The two checkpoints the deployed learned path loads are in the same repository and are identified here by digest — the conditional denoiser (`636c72a797ee6d0b725449293d5cd230dbd64c8eb03e345da4561b0c265239d9`) and the normalisation prior `setdiff_prior.pt` (`5e8418cc1658a665c032698630b744af7ed4e3ee5fad721fa31d554724efbb34`) — so a reader can verify that the released weights are the ones these numbers came from.

The buoy directional-spread statistics used for the external-validity stratification of the retracted corpus (archived) are third-party observations from the Coastal Data Information Program [43], retrieved over OPeNDAP on 2026-08-03. We release the station list, the pre-fixed sampling rule, the retrieval and estimator scripts, and the derived per-record spread values, so that the stratification is reproducible without redistributing CDIP data.

We could not locate a public, phase-resolved, two-dimensional *lidar* sea-surface dataset, and we state the scope of that search rather than assert non-existence. The measured evaluation in this paper therefore uses stereo reconstructions from fixed stations rather than lidar, which is itself a scope limit: the sensor that motivates the method is not the sensor the negative result was obtained with. We enumerated the collections of the USACE Field Research Facility THREDDS server to collection level—its `frf/` and `projects/` trees

and the nine collections at the server root—and found one candidate, a 30-file, three-day scanning-lidar wave-shape deployment; that campaign's lidar coverage is three days of a sixteen-day campaign, which is a property of the deployment rather than of our search. We also confirmed that no public download path exists for the processed free-ocean wave dataset (FOWD) product. Airborne scanning-lidar measurements of open-ocean waves do exist in the literature [12]; what we could not find is a public archive of the underlying point data. This is a statement about the reach of our search, and a dataset outside it would not surprise us.

Acknowledgments

The author thanks the Avikus engineering team for discussions on shipboard LiDAR integration and practical deployment considerations.

References

[1] O. M. Faltinsen, Hydrodynamics of High-Speed Marine Vehicles, Cambridge University Press, 2005.

[2] L. H. Holthuijsen, Waves in Oceanic and Coastal Waters, Cambridge University Press, 2007.

[3] N. Desmars, M. Hartmann, J. Behrendt, N. Hoffmann, M. Klein, Nonlinear deterministic reconstruction and prediction of remotely measured ocean surface waves, Journal of Fluid Mechanics 975 (2023) A8. doi:10.1017/jfm.2023.841.

[4] R. Vettor, C. Guedes Soares, Development of a ship weather routing system, Ocean Engineering 123 (2016) 1–14.

[5] S. Park, Wave-preview feedforward control for hydrofoil vessels using LiDAR-based spectral wave estimation, Ocean Engineering (2026). Submitted.

[6] Det Norske Veritas, Recommended Practice DNV-RP-C205: Environmental Conditions and Environmental Loads, Technical Report, DNV, 2010.

[7] Datawell BV, Datawell Waverider Reference Manual, 2009.

[8] J. C. Nieto-Borge, G. R. Rodríguez, K. Hessner, P. I. González, Inversion of marine radar images for surface wave analysis, Journal of Atmospheric and Oceanic Technology 21 (2004) 1291–1300.

[9] I. R. Young, W. Rosenthal, F. Ziemer, A three-dimensional analysis of marine radar images for the determination of ocean wave directionality and surface currents, Journal of Geophysical Research: Oceans 90 (1985) 1049–1059.

[10] P. Queffeulou, Long-term validation of wave height measurements from altimeters, Marine Geodesy 27 (2004) 495–510.

[11] M. R. Belmont, J. M. K. Horwood, R. W. F. Thurley, J. Baker, Shallow angle wave profiling LIDAR, in: 2008 IEEE/OES 9th Working Conference on Current Measurement Technology, 2008, pp. 217–223. doi:10.1109/CCM.2008.4480871.

[12] P. A. Hwang, W. B. Krabill, W. Wright, R. N. Swift, E. J. Walsh, Airborne scanning lidar measurement of ocean waves, Remote Sensing of Environment 73 (2000) 236–246. doi:10.1016/S0034-4257(00)00098-5.

[13] N. Desmars, F. Bonnefoy, S. T. Grilli, G. Ducrozet, Y. Perignon, C.-A. Guérin, P. Ferrant, Experimental and numerical assessment of deterministic nonlinear ocean waves prediction algorithms using non-uniformly sampled wave gauges, Ocean Engineering 212 (2020) 107659. doi:10.1016/j.oceaneng.2020.107659.

[14] G. Evensen, The ensemble Kalman filter: Theoretical formulation and practical implementation, Ocean Dynamics 53 (2003) 343–367.

[15] B. Kerbl, G. Kopanas, T. Leimkühler, G. Drettakis, 3d Gaussian splatting for real-time radiance field rendering, in: ACM SIGGRAPH, 2023, pp. 1–14.

[16] M. A. Donelan, W. M. Drennan, A. K. Magnusson, Nonstationary analysis of the directional properties of propagating waves, Journal of Physical Oceanography 26 (1996) 1901–1914.

[17] R. Pascoal, L. P. Perera, C. Guedes Soares, Estimation of directional sea spectra from ship motions in sea trials, Ocean Engineering 132 (2017) 126–137. doi:10.1016/j.oceaneng.2017.01.020.

[18] H. Kim, H. Kang, M.-H. Kim, Real-time inverse estimation of ocean wave spectra from vessel-motion sensors using adaptive Kalman filter, Applied Sciences 9 (2019) 2797. doi:10.3390/app9142797.

[19] F. Fucile, G. Bulian, C. Lugni, A probabilistic approach for the quantification of prediction error in deterministic phase-resolved wave forecasting, Ocean Engineering 163 (2018) 718–736. doi:10.1016/j.oceaneng.2018.04.079.

[20] P. Naaijen, K. Trulsen, E. Blondel-Couprie, Limits to the extent of the spatio-temporal domain for deterministic wave prediction, International Shipbuilding Progress 61 (2014) 203–223. doi:10.3233/ISP-140113.

[21] U. D. Nielsen, Estimations of on-site directional wave spectra from measured ship responses, Marine Structures 19 (2006) 33–69.

[22] H. Kim, Real-time monitoring by using Kalman filter in the ocean, Ph.D. thesis, Texas A&M University, 2020.

[23] F. Wang, Q. Zhu, C. Cai, X. Wang, R. Qiao, From points to waves: Fast ocean wave spatial–temporal fields estimation using ensemble transform Kalman filter with optical measurement, Coastal Engineering 197 (2025) 104690. doi:10.1016/j.coastaleng.2024.104690.

[24] B. R. Hunt, E. J. Kostelich, I. Szunyogh, Efficient data assimilation for spatiotemporal chaos: a local ensemble transform Kalman filter, Physica D: Nonlinear Phenomena 230 (2007) 112–126. doi:10.1016/j.physd.2006.11.008.

[25] H. L. Tolman, User manual and system documentation of WAVEWATCH III version 3.14, Technical Report 276, NOAA/NWS/NCEP/MMAB, 2009.

[26] M. Charnotskii, Sparse spectrum model of the sea surface, in: Proceedings of the ASME 30th International Conference on Ocean, Offshore and Arctic Engineering (OMAE 2011), Rotterdam, The Netherlands, 2011, pp. 773–780.

[27] A. G. Wilson, R. P. Adams, Gaussian process kernels for pattern discovery and extrapolation, in: Proceedings of the 30th International Conference on Machine Learning (ICML), volume 28, 2013, pp. 1067–1075.

[28] I. R. Young, On the measurement of directional wave spectra, Applied Ocean Research 16 (1994) 283–294.

[29] J. Capon, High-resolution frequency-wavenumber spectrum analysis, Proceedings of the IEEE 57 (1969) 1408–1418.

[30] R. O. Schmidt, Multiple emitter location and signal parameter estimation, IEEE Transactions on Antennas and Propagation 34 (1986) 276–280.

[31] C. E. Rasmussen, C. K. I. Williams, Gaussian Processes for Machine Learning, MIT Press, 2006.

[32] M. K. Titsias, Variational learning of inducing variables in sparse Gaussian processes, in: Proceedings of the 12th International Conference on Artificial Intelligence and Statistics (AISTATS), 2009, pp. 567–574.

[33] M. Liu, S. Dong, J. Chen, Y. Zhang, Optimized quiescent period prediction under harsh sea states using a linear wave model based on physics-informed

neural networks, Ocean Engineering 310 (2024) 118763. doi:10.1016/j.oceaneng.2024.118763.

[34] F. Mohaghegh, J. Murthy, M.-R. Alam, Rapid phase-resolved prediction of nonlinear dispersive waves using machine learning, Applied Ocean Research 117 (2021) 102920. doi:10.1016/j.apor.2021.102920.

[35] S. Ehlers, M. Klein, A. Heinlein, M. Wedler, N. Desmars, N. Hoffmann, M. Stender, Machine learning for phase-resolved reconstruction of nonlinear ocean wave surface elevations from sparse remote sensing data, Ocean Engineering 288 (2023) 116059. doi:10.1016/j.oceaneng.2023.116059.

[36] E. J. Candès, J. Romberg, T. Tao, Robust uncertainty principles: Exact signal reconstruction from highly incomplete frequency information, IEEE Transactions on Information Theory 52 (2006) 489–509.

[37] S. G. Mallat, Z. Zhang, Matching pursuits with time-frequency dictionaries, IEEE Transactions on Signal Processing 41 (1993) 3397–3415.

[38] D. P. Kingma, J. Ba, Adam: A method for stochastic optimization, in: Proceedings of the 3rd International Conference on Learning Representations (ICLR), 2015.

[39] K. Hasselmann, T. P. Barnett, E. Bouws, et al., Measurements of wind-wave growth and swell decay during the Joint North Sea Wave Project (JONSWAP), Ergänzungsheft zur Deutschen Hydrographischen Zeitschrift A8 (1973) 1–95.

[40] Y. Zheng, A. G. L. Borthwick, Z. Lin, Reconstruction of nonlinear wave fields from radar images, Physics of Fluids 37 (2025) 117116. doi:10.1063/5.0292004, data: Zenodo 17359600, CC-BY-4.0. The archive ships no documentation naming the generating solver; we therefore do not describe this corpus as higher-order or fully non-linear.

[41] M. Born, E. Wolf, Principles of Optics: Electromagnetic Theory of Propagation, Interference and Diffraction of Light, 7th ed., Cambridge University Press, 1999.

[42] G. M. Hale, M. R. Querry, Optical constants of water in the 200-nm to 200-μm wavelength region, Applied Optics 12 (1973) 555–563.

[43] Coastal Data Information Program, CDIP wave observation archive, scripps institution of oceanography, university of california san diego, THREDDS/OPeNDAP archive, `https://thredds.cdip.ucsd.edu/thredds/catalog.html`, 2026. Directional moment variables `waveA1Value`, `waveB1Value` and `waveEnergyDensity`; 24 stations, 25,426 quality-flagged records accessed 2026-08-03.